CS-1 Dec. 1978 **OCT. 20. 1978**

CHANGING RESISTANCE VALUE

[illegible]-ohm → 1.2K 47K → 150K

1. For convenient vol. balance between DIRECT and EFFECT sounds.(can be balanced around center of rotation)
2. For reducing noise in TREBLE MODE.
3. Consequently, numbers in OUTPUT level are changed:

serial no. 7700 and higher.

SUS-TAIN	INPUT Signal		OUTPUT Level	
	Sine		Mode NORMAL	Mode TREBLE
Max	1kHz	+10dBm	less than -10dBm	-10dBm
		0dBm	-15dBm	-15dBm
		-20dBm	-17dBm	-17dBm
		-40dBm	-18dBm	-18dBm
Min		-40dBm	-36dBm	-33dBm
Max	100Hz	-55dBm	-23dBm	-30dBm
Max	2kHz	-55dBm	-26dBm	-21dBm

acceptable tolerance ±3dB

1.2K 150K
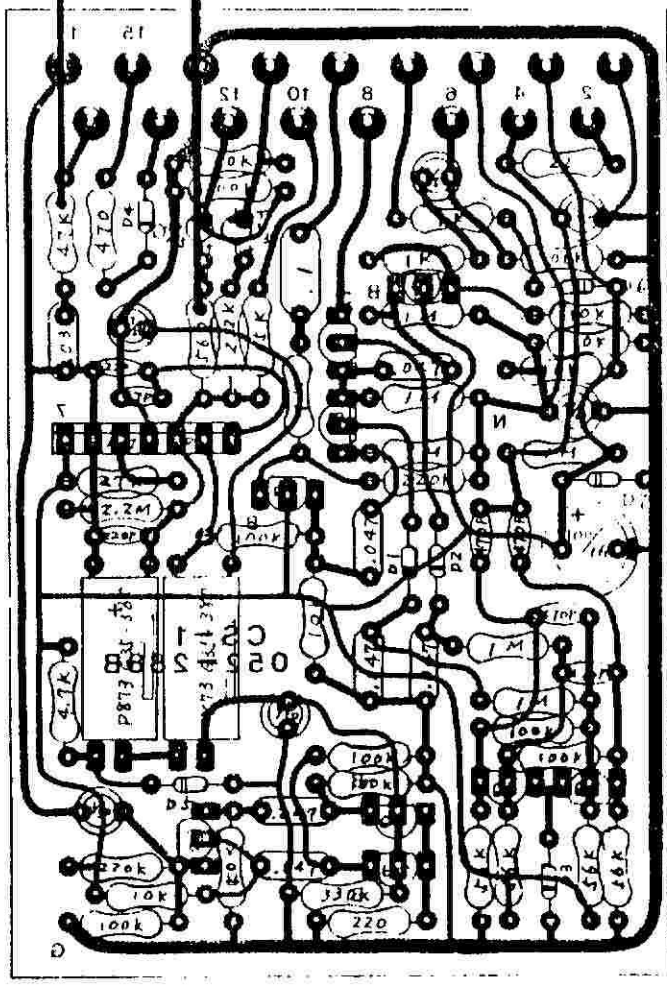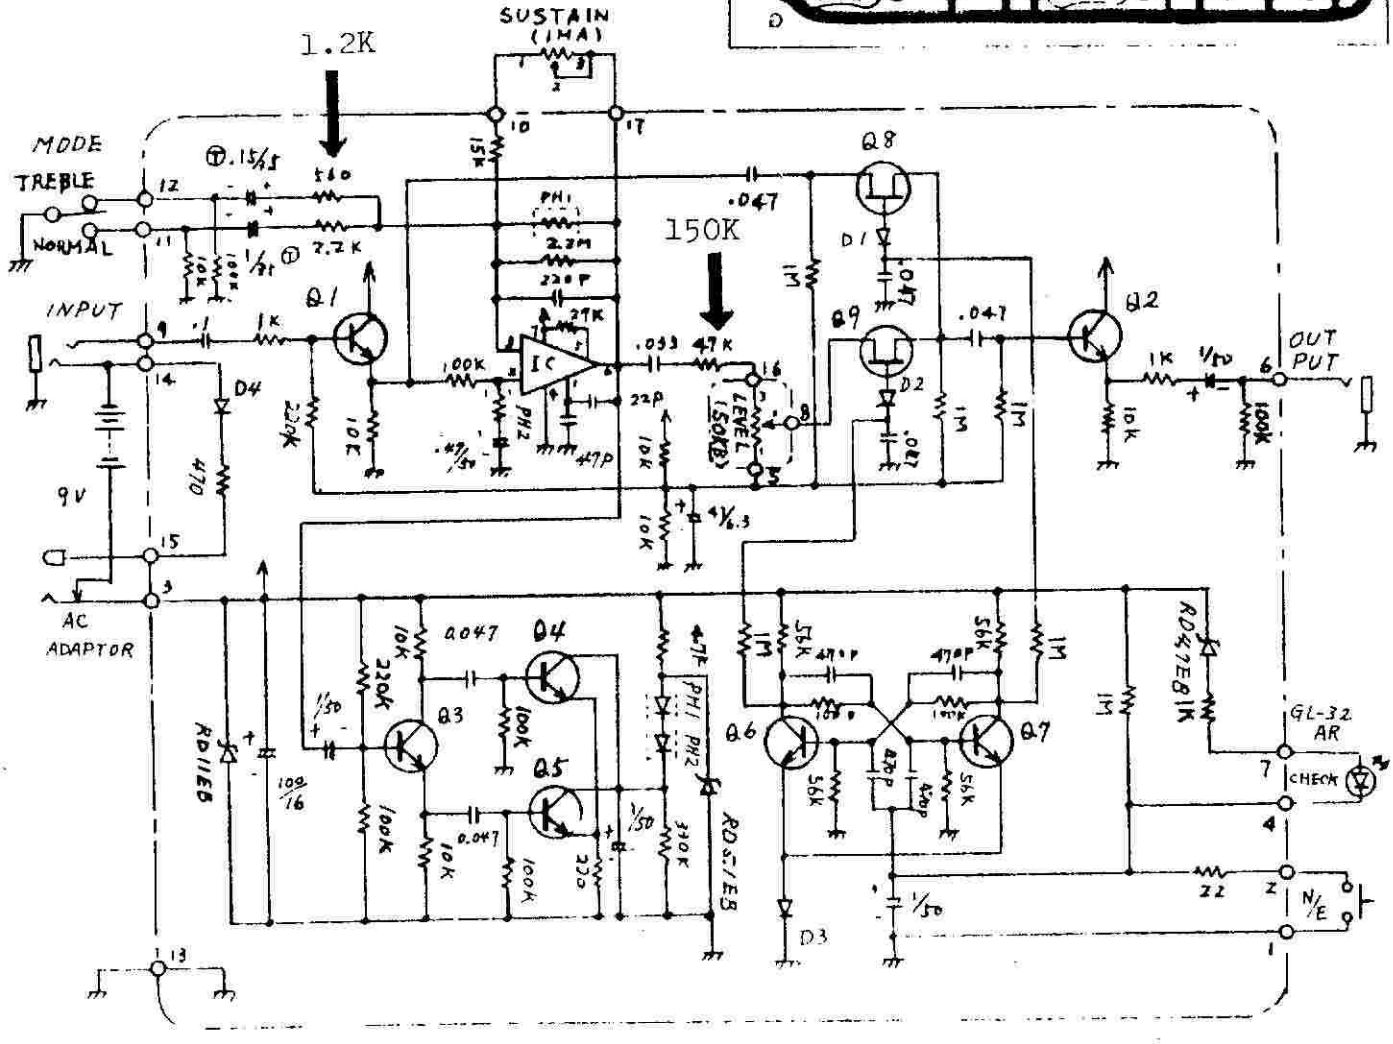
ET-30B (151-030B)