Drawn 3-14-2001
Gustav C. Smalley

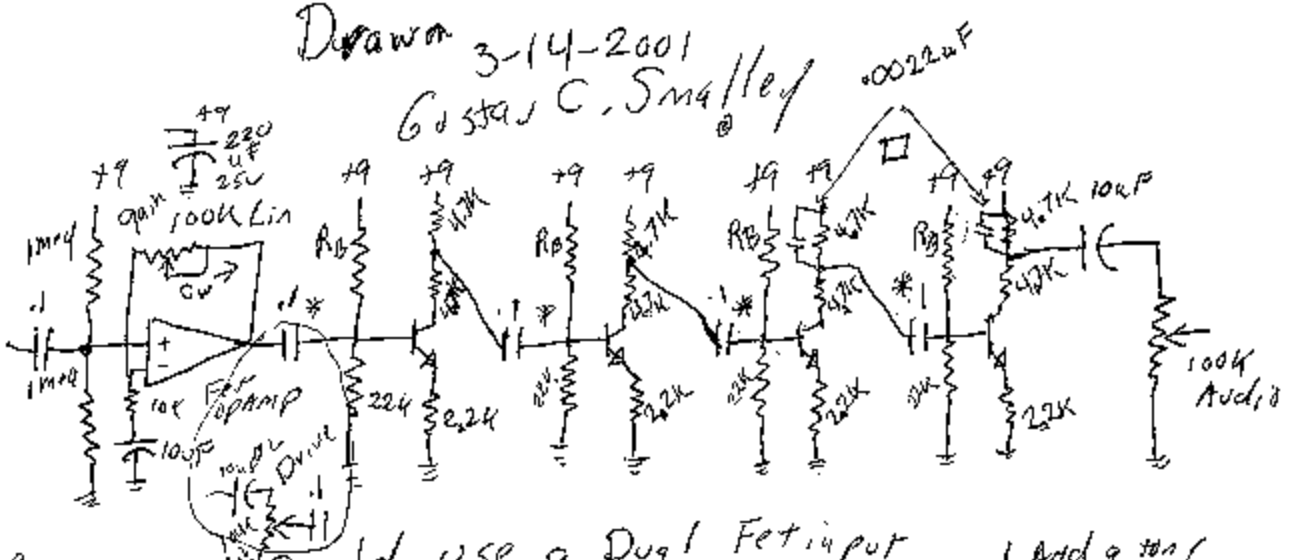

Could use a Dual Fet input and Add a tone source
and use ½ as a Buffer output
* 1uF tone High pass filters can all be different
□ .0022 tone Low pass Filters

Use 2N5088's
MPSA18's
hFE ≥ 500

Av collector at ≅ 4.5V RB ≅ 100K
Av collector at ≅ 3V RB ≅ 75K try 82K

RB adjusts Bias and Harmonic content. or a 33K series with 47K

Needs Good Layout and Good P/S Bypass Cap(s)

Not Built should have Long sustain a MPN instead of Fet express