



IC_{1,2,3}: LM1458N
 IC₄: LM741CH
 C_{1,2,3,4}: 25K-20A(CO)
 D₁: PD5A-N
 D₂: TLR-102
 D₃: RD6A-L
 D₄: 1S958

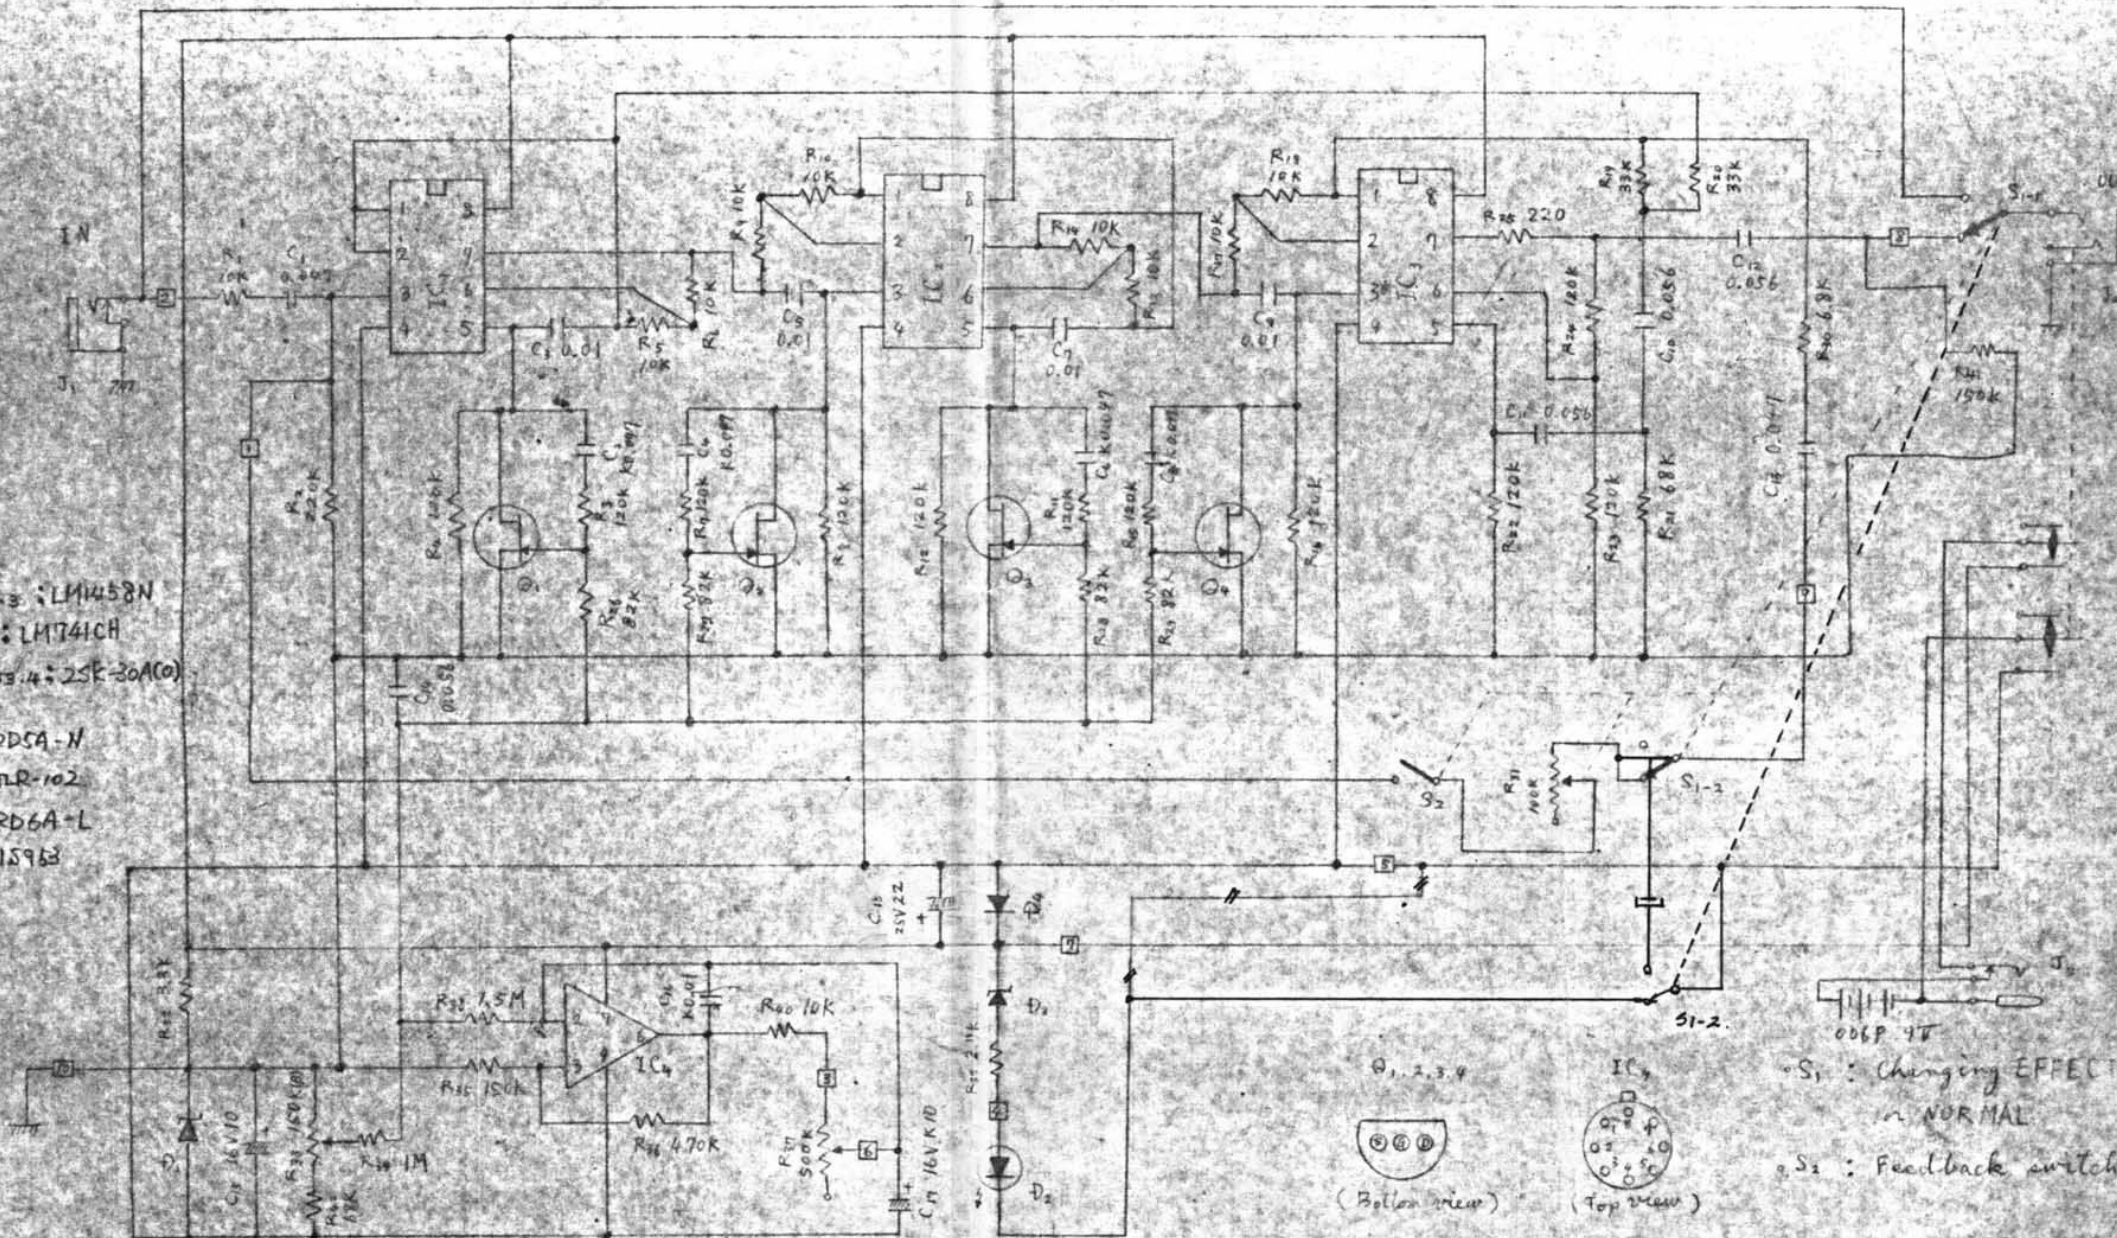

Vox 1900 PHASER

notes: All resistors value are in ohms. (k=1000Ω, M=10⁶Ω)
 all capacitors value are in micro farads. (p=10⁻⁶μF)
 Tolerance of all resistors is k=±10%
 Tolerance: K=±10%

tolerance of all capacitors (except the electrolytic capacitors) is M=±20% unless otherwise indicated.

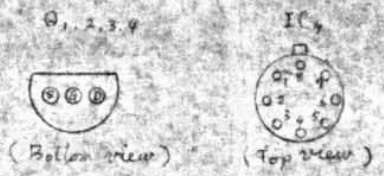

S₁: Changing EFFECT
 or NORMAL
 S₂: Feedback switch

①		型番	PS-101	図号	
②		名称	SCHMATIC DIAGRAM	4位	調換
③		材質		異材	等価
④	PCB変更の為	78.8%		異材	等価
⑤	C ₁ 再追加	76.8%		異材	等価
⑥	C ₂ 再追加	76.8%		異材	等価
⑦	R ₁ 追加	76.8%		異材	等価
⑧	訂正				

(株) ヲヤ