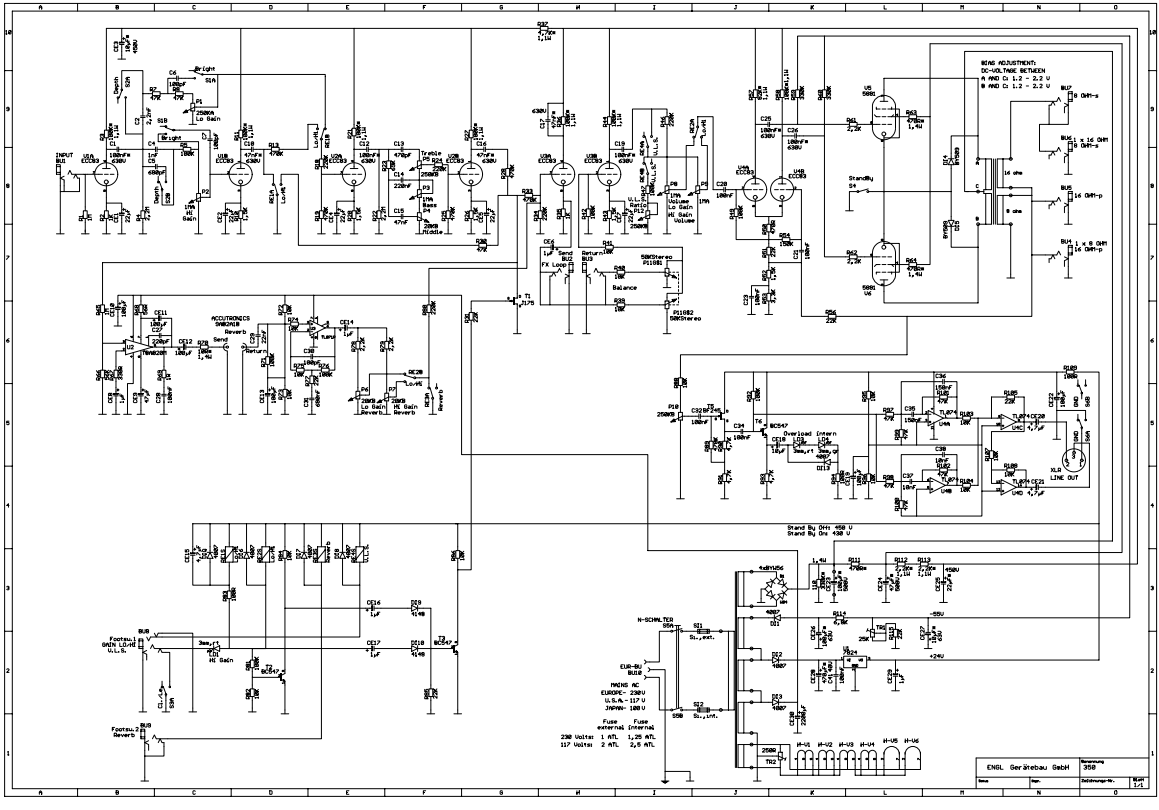
BIAS ADJUSTMENT:
DC-VOLTAGE BETWEEN
A AND C: 1.2 - 2.2 V
B AND C: 1.2 - 2.2 V
INPUT
Bright
Depth
Treble
Bass
Middle
Volume
Lo Gain
Hi Gain
Send
Return
FX Loop
Balance
Reverb
Overload Intern
LINE OUT
Stand By OFF: 458 V
Stand By ON: 438 V
N-SCHALTER
EUS-BJ
BUS8
MAINS AC
EUROPE: 230V
U.S.A.: 117 V
JAPAN: 100 V
Fuse external
Fuse internal
230 Volts: 1 AT.L 1,25 AT.L
117 Volts: 2 AT.L 2,5 AT.L
ENGL Gerätebau GmbH
Benennung
350
Blatt
1/1