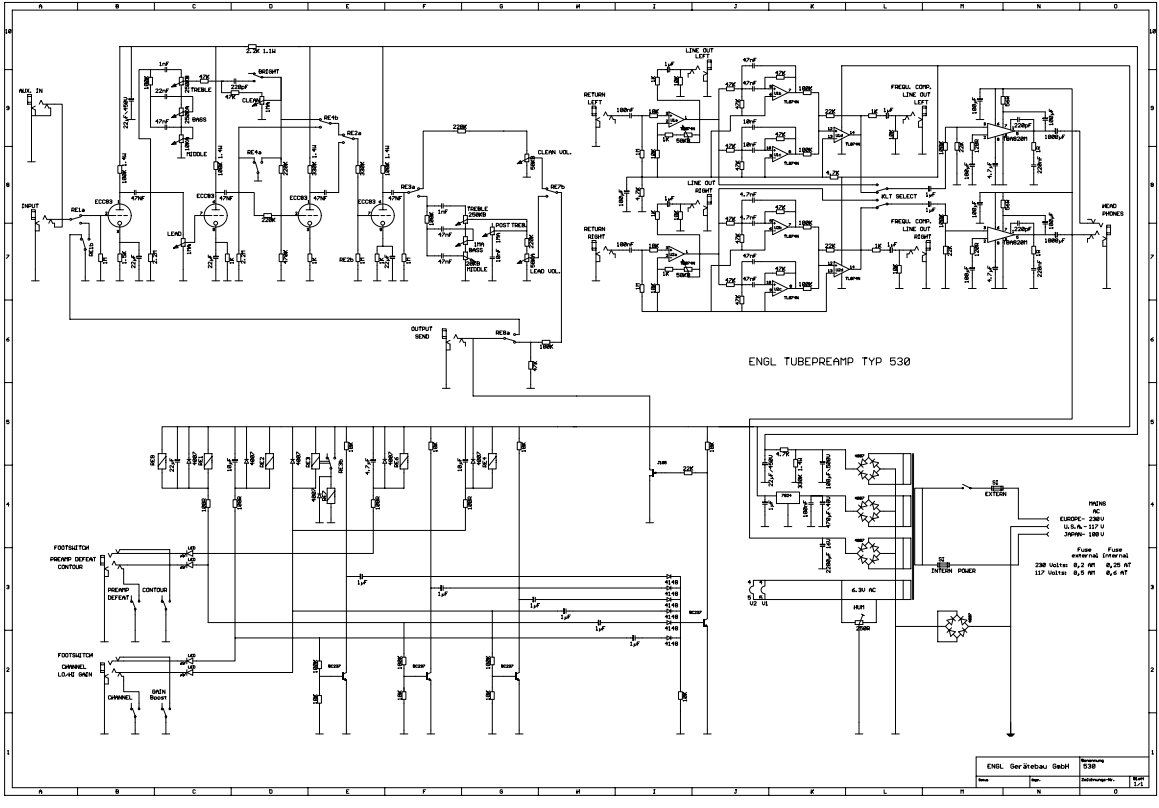
ENGL TUBEPREAMP TYP 530
AUX IN
INPUT
RE1a
RE1b
ECC83
TREBLE
BASS
MIDDLE
LEAD
BRIGHT
CLEAN
2.2K 1.1W
RE4b
RE2a
RE4a
RE2b
RE3a
RE3b
RE7b
CLEAN VOL.
LEAD VOL.
TREBLE 250KB
POST TRIM
OUTPUT SEND
RE8a
RETURN LEFT
RETURN RIGHT
LINE OUT LEFT
LINE OUT RIGHT
TL074N
FREQU. CORR. LINE OUT LEFT
FREQU. CORR. LINE OUT RIGHT
VOLT SELECT
HEAD PHONES
FOOTSWITCH PREAMP DEFEAT CONTOUR
PREAMP DEFEAT
CONTOUR
FOOTSWITCH CHANNEL LO/HI GAIN
CHANNEL
GAIN Boost
BC237
S2 EXTERN
S3 INTERN POWER
MAINS AC
EUROPE- 230V
U.S.A.- 117 V
JAPAN- 100 V
Fuse external
Fuse Internal
230 Volts 0,2 AT 0,25 AT
117 Volts 0,5 AT 0,6 AT
6.3V AC
HUM
U2 U1
ENGL Gerätebau GmbH
Bezeichnung 530
Datum
Mgb.
Zeichnungs-Nr.
Blatt 1/1