


FENDER "PRO-AMP" LAYOUT MODEL 5C5

VOLTAGES READ TO GROUND WITH ELECTRONIC VOLTMETER. VALUES SHOWN + OR - 20%

NOTE - EARLY MODELS HAVE ONLY ONE SPEAKER JACK.
 - LATER MODELS HAVE 1 MEG. FEEDBACK RESISTOR FROM VOICE COIL TO GRID OF 2ND 6L6G.
 - LATEST MODELS USE 12 VOLT GLASS MINIATURES IN PLACE OF 6SCTs (SAME CIRCUIT) SEE PARENTHESES AT BOTTOM

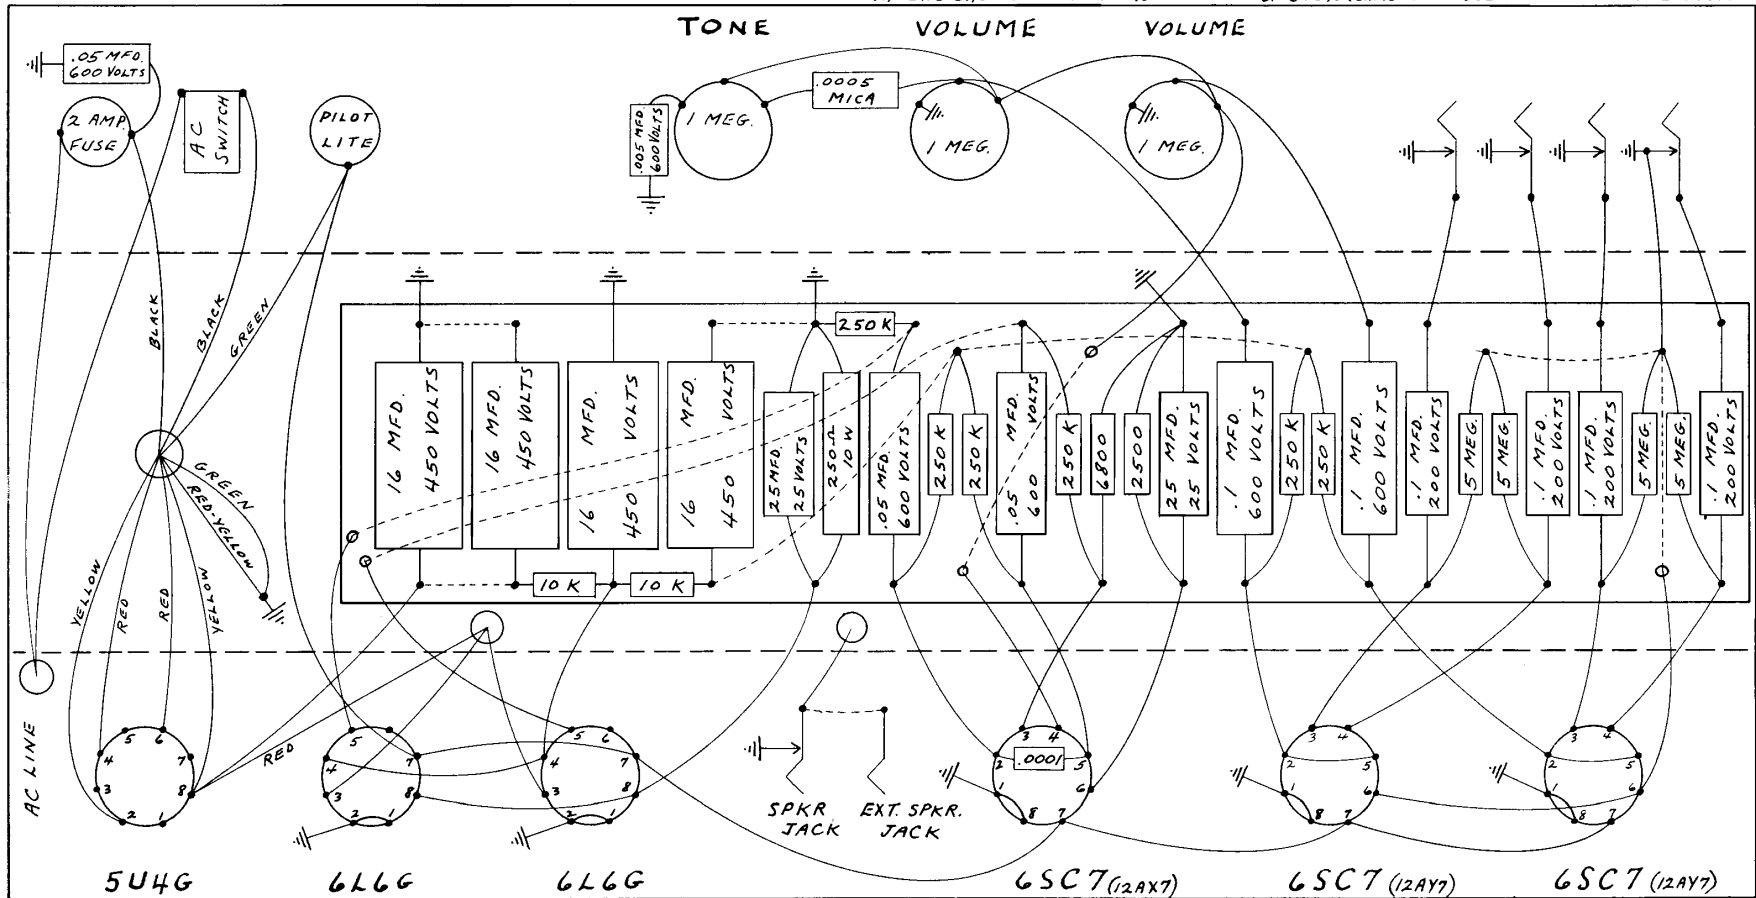

FENDER "PRO-AMP" SCHEMATIC MODEL 5C5

