
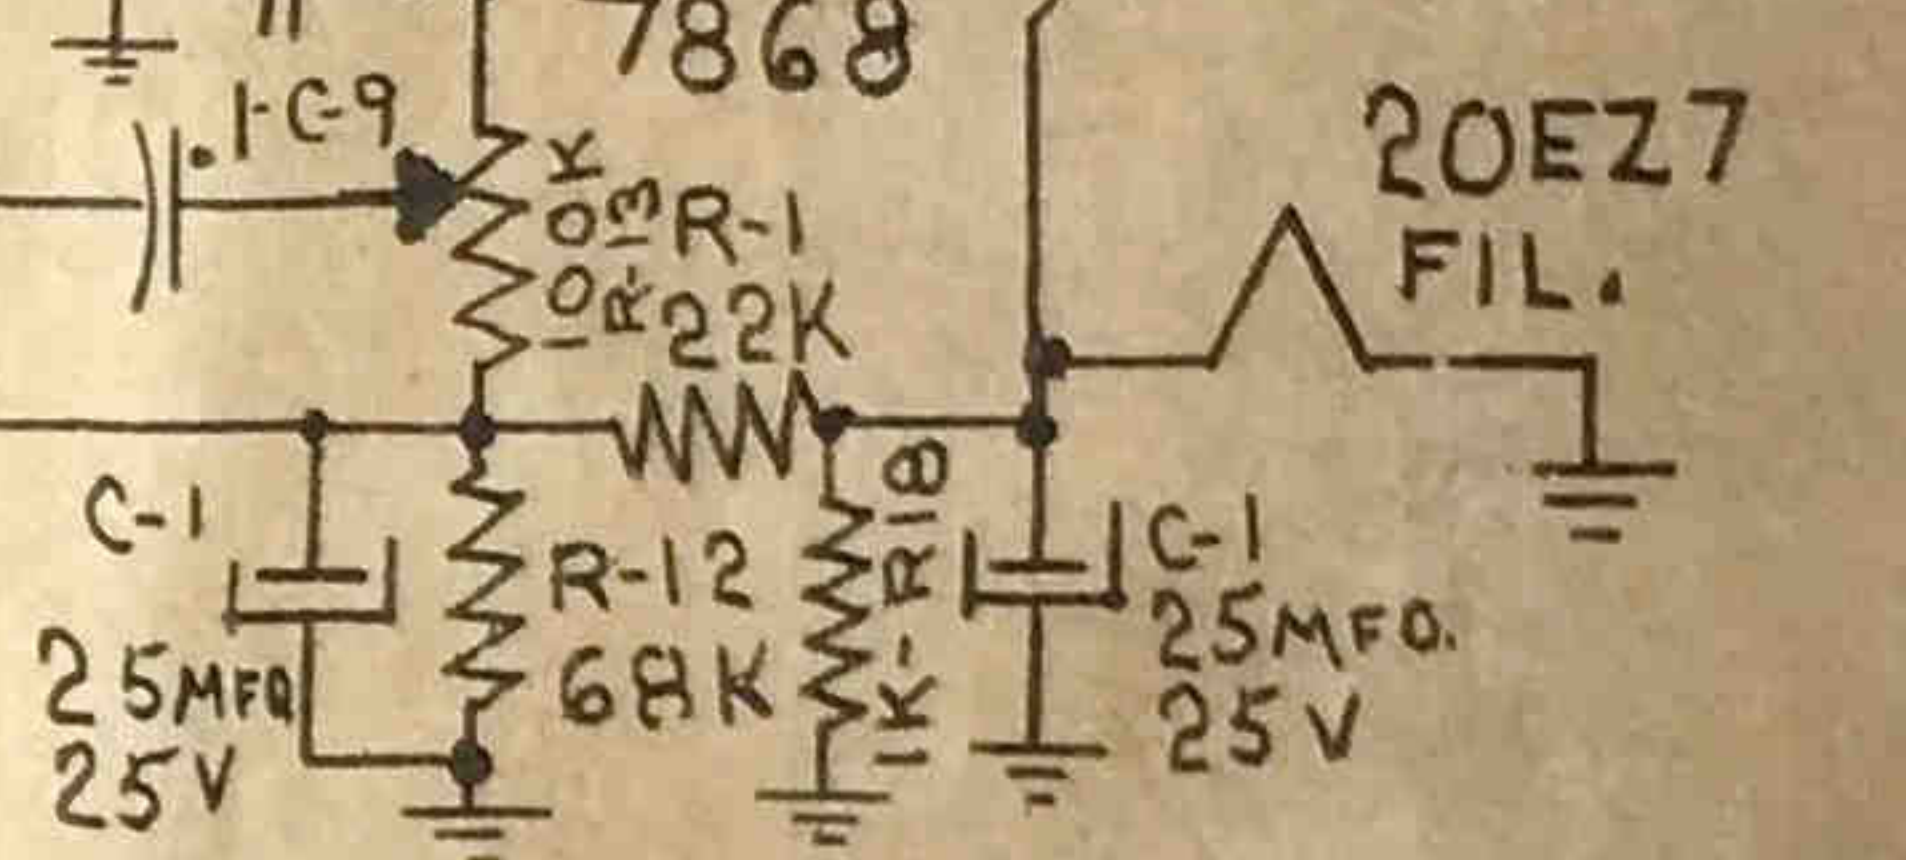
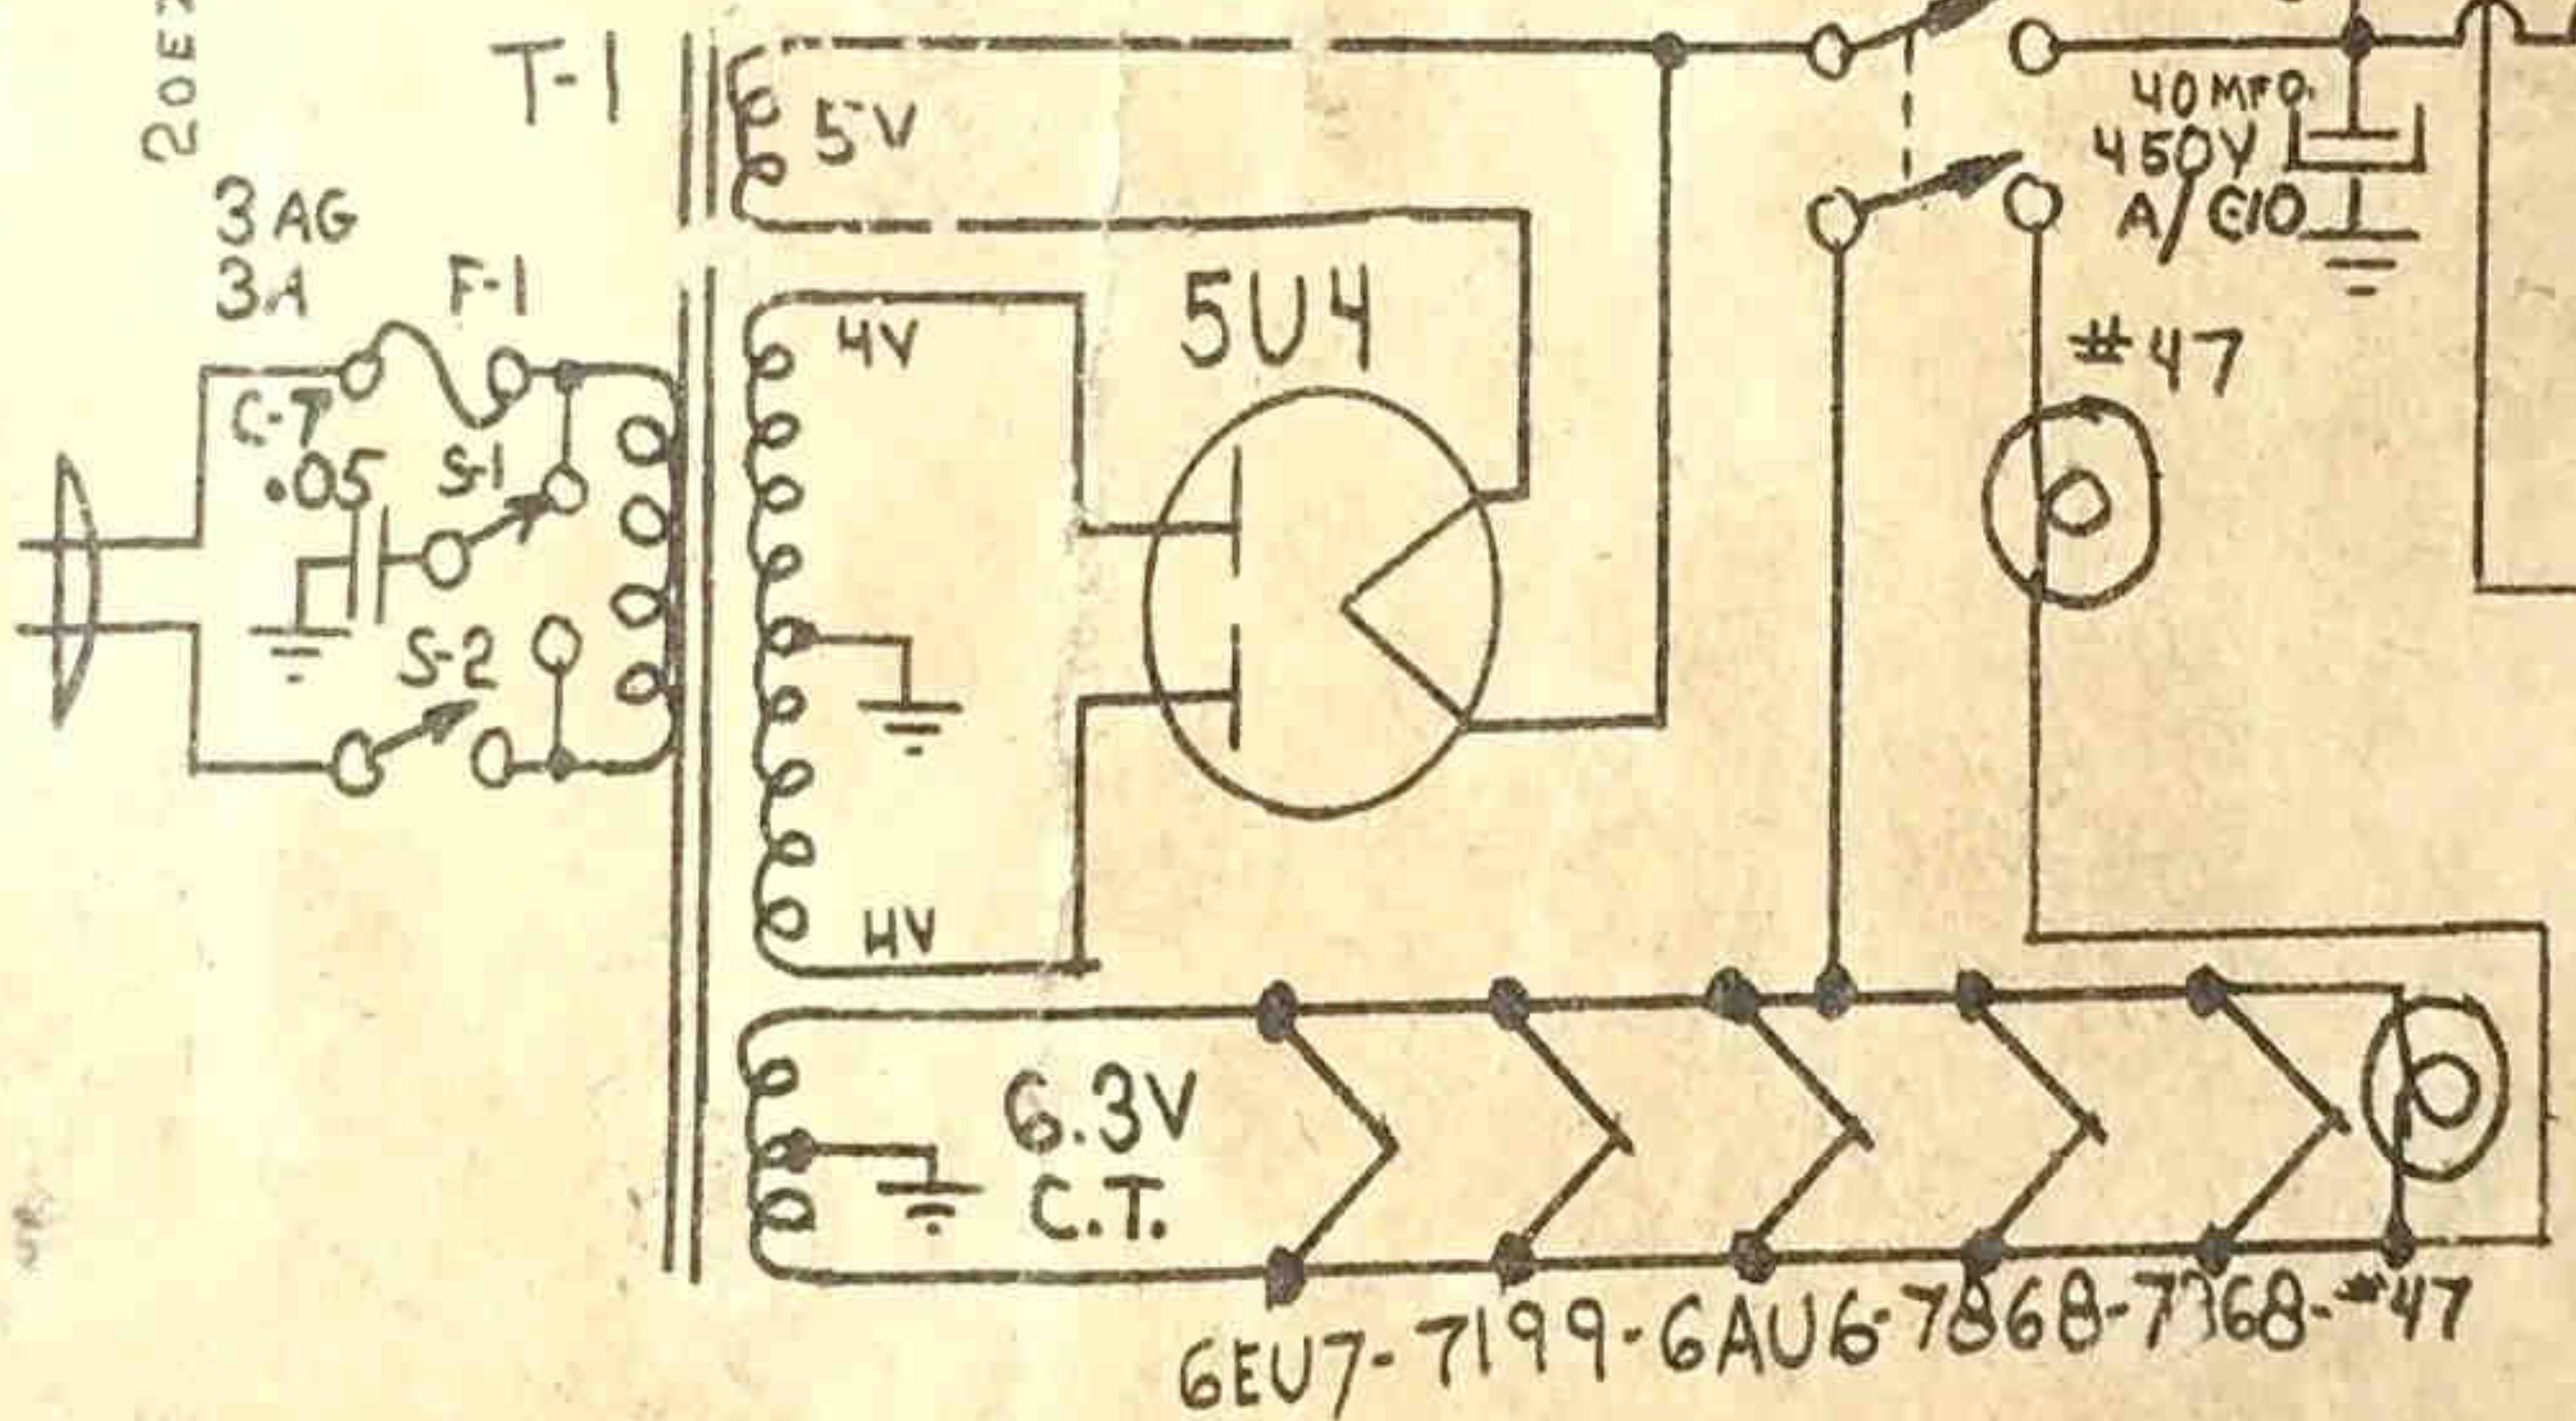
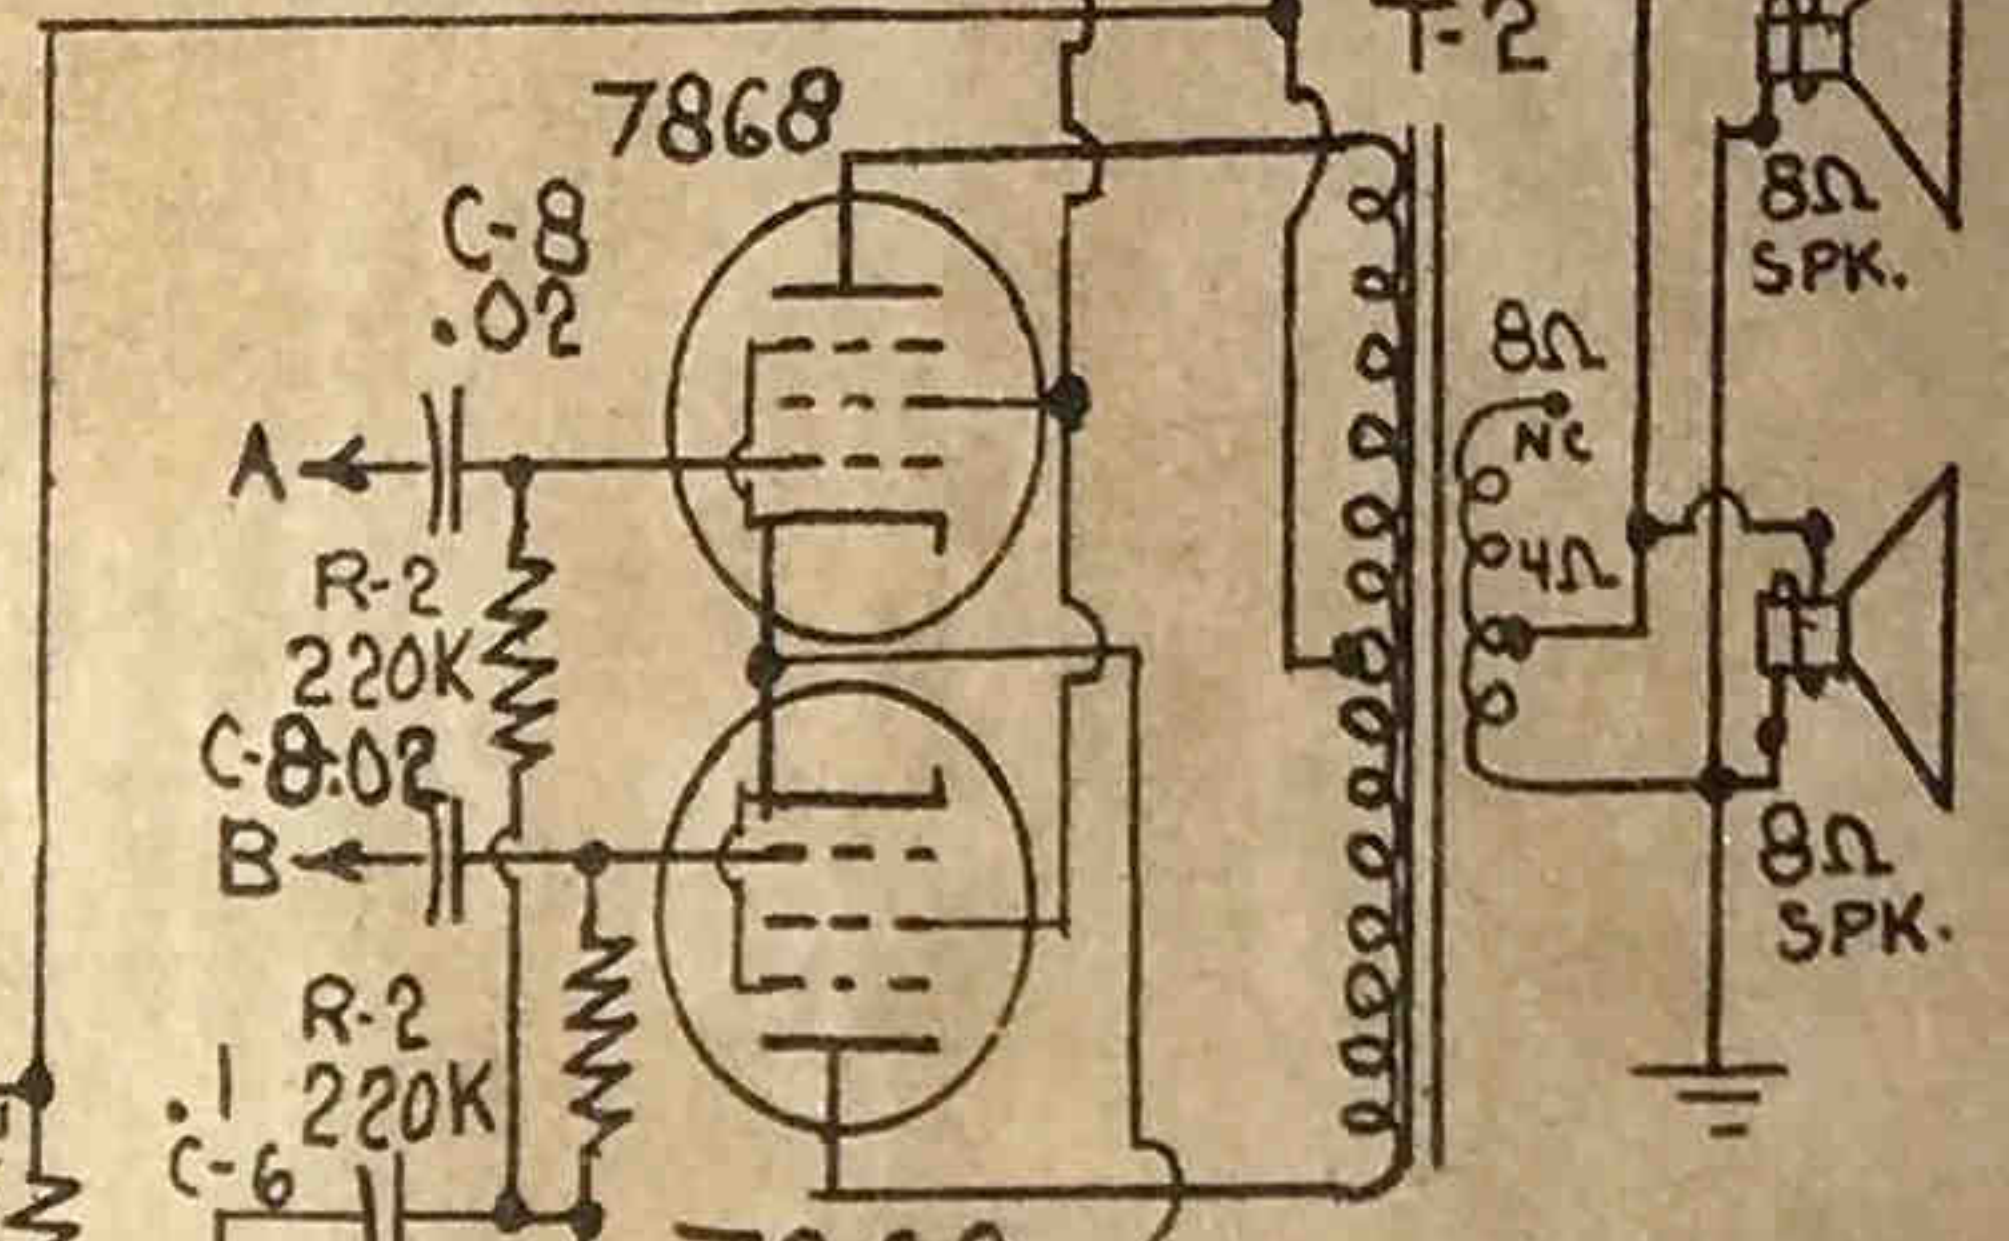
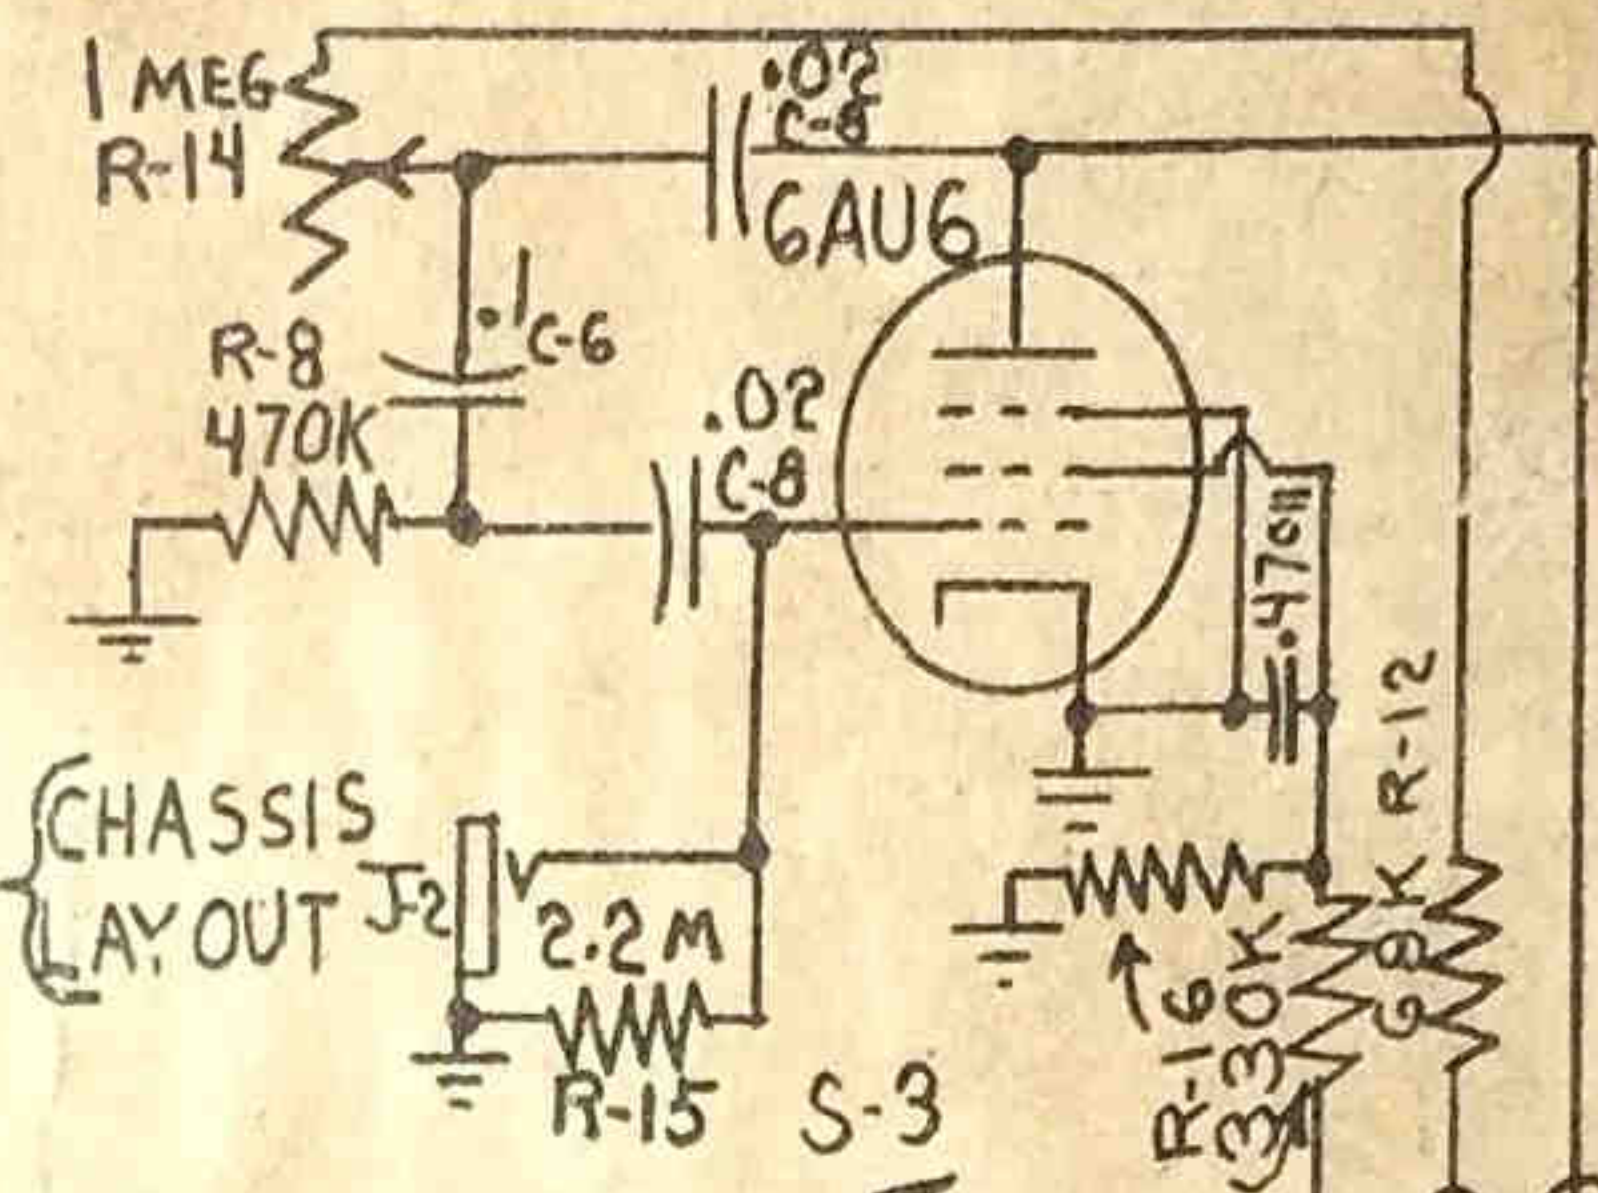


MODEL # 507

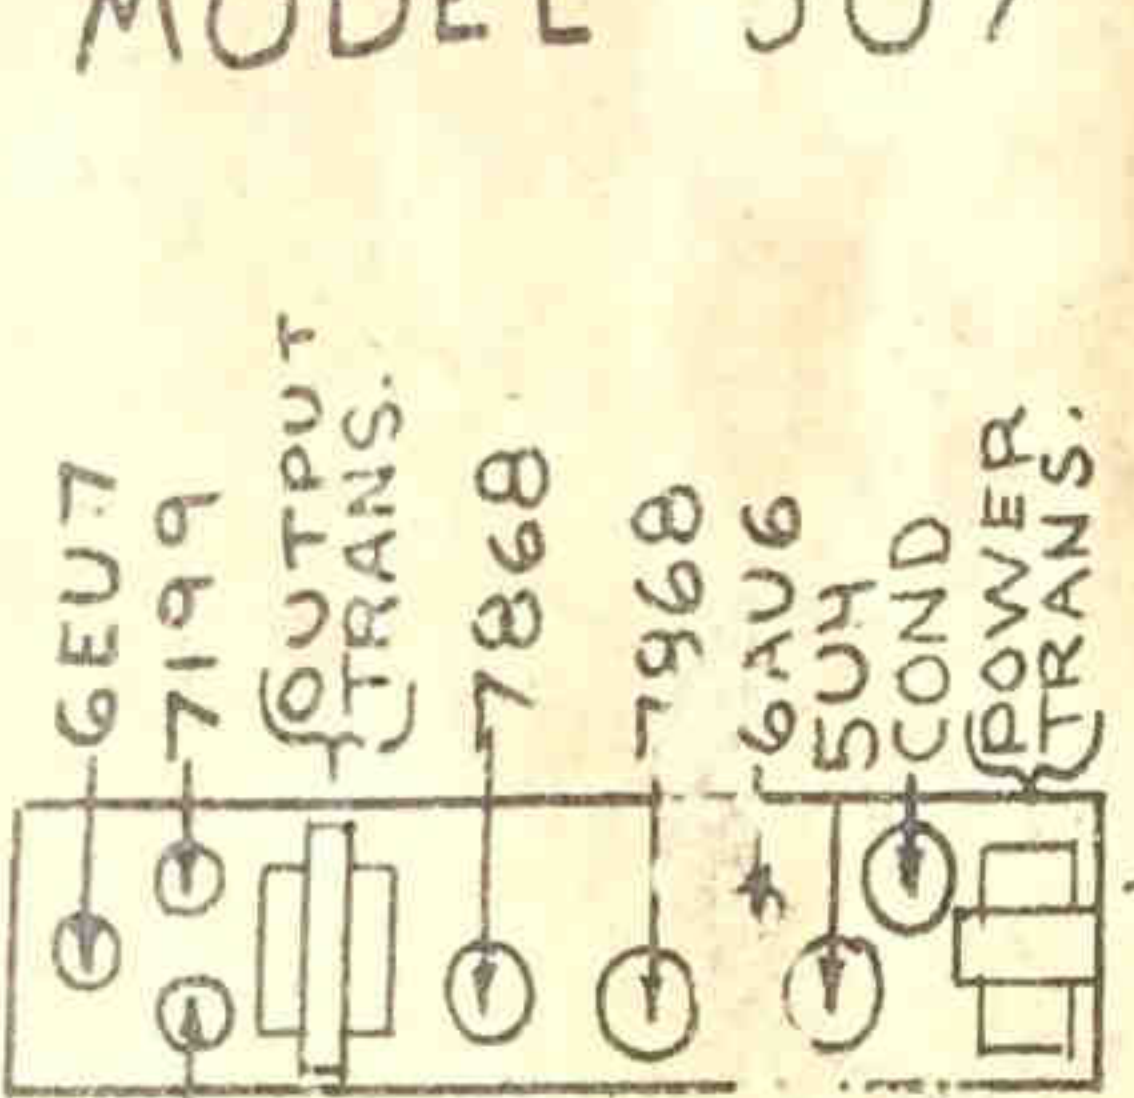

8-10-61

KAY MUSICAL INSTRUMENT CO.

1640 W. WALNUT ST.

CHICAGO 12, ILL.

MODEL #K507

B 1402

HOW TO ORDER PARTS FOR YOUR GUITAR AMPLIFIER:

These authorized replacement parts may be ordered through the dealer from whom the amplifier was purchased.

1. THE PART NUMBER (number printed on part, if different from that shown in this list) and the DESCRIPTION.  
When no number is assigned, order by DESCRIPTION AND RATING.
2. The MODEL NUMBER will be found on the sticker on the inside of your amplifier cabinet.

PARTS LIST

<u>SCHEMATIC LOCATION</u>	<u>PART NO.</u>	<u>DESCRIPTION</u>	<u>SCHEMATIC LOCATION</u>	<u>PART NO.</u>	<u>DESCRIPTION</u>
	2404	Cabinet	R-1	102	22K 1/2W Resistor
	300	10" Chrome Handle	R-2	106	220K 1/2W Resistor
	404	10" Speaker	R-3	151	820 Ohm 1/2W Resistor
T-1	1701	Power Transformer	R-4	145	100K 1W Resistor
T-2	1703	Output Transformer	R-6	150	150K 1/2W Resistor
	1113	Octal Socket	R-8	121	470K 1/2W Resistor
	1103	9 Pin Socket	R-9	124	15K 1/2W Resistor
	1101	7 Pin Soc <sup>l</sup>	R-10	152	180K 1/2W Resistor
	1115	Novar Socket	R-11	157	15K 5% 2W Resistor
	2025	10' Cord Set	R-12	131	68K 1/2W Resistor
C-1	200	25 MFD 25V Cond.	R-15	126	2.2 Meg 1/2W Resistor
C-2	228	470MMFD. 1KV Cond.	R-16	153	330K 1/2W Resistor
C-3	206	.005 MFD. 1KV Cond.	R-17	156	10K 2W Resistor
C-4	231	.01 MFD 1KV Cond.	R-18	159	1K 1/2W Resistor
C-5	225	50 MFD 100V Cond.	S-1	1001	SPDT Toggle Switch
C-6	212	.1 MFD. 200V Cond.	S-2	1000	SPST Toggle Switch
C-7	219	.05 MFD 400V Cond.	S-3	1002	DPST Toggle Switch
C-8	211	.02 MFD 400V Cond.		1502	Black Pointer Knob
C-9	207	.1 MFD 400V Cond.	F-1	1400	Fuse Holder Assembly
C-10	203	40-20-20 MFD Cond. 450V	F-1	1401	3AG 3 Amp Fuse
C-11	229	.47 MFD 400V Cond.	J-1	901	Closed Circuit Jack
	1301	Pilot Light Assembly	J-2	900	Open Circuit Jack
	817	6EU7 Tube	R-5	1615	200K C-1 Control
	816	7199 Tube	R-7	1605	1 Meg C-2 Control
	821	20EX7 Tube	R-13	1616	100K C-1 Control
	820	7868 Tube	R-14	1617	1 Meg C-1 Control
	818	6AU6 Tube		1300	#47 Lamp
	801	5U4 Tube		1107	Tube Shield