


FENDER "SUPER-AMP" LAYOUT MODEL 5E4-A*

NOTICE

VOLTAGES READ TO GROUND
WITH ELECTRONIC VOLTMETER
VALUES SHOWN + OR - 20%

G-EE

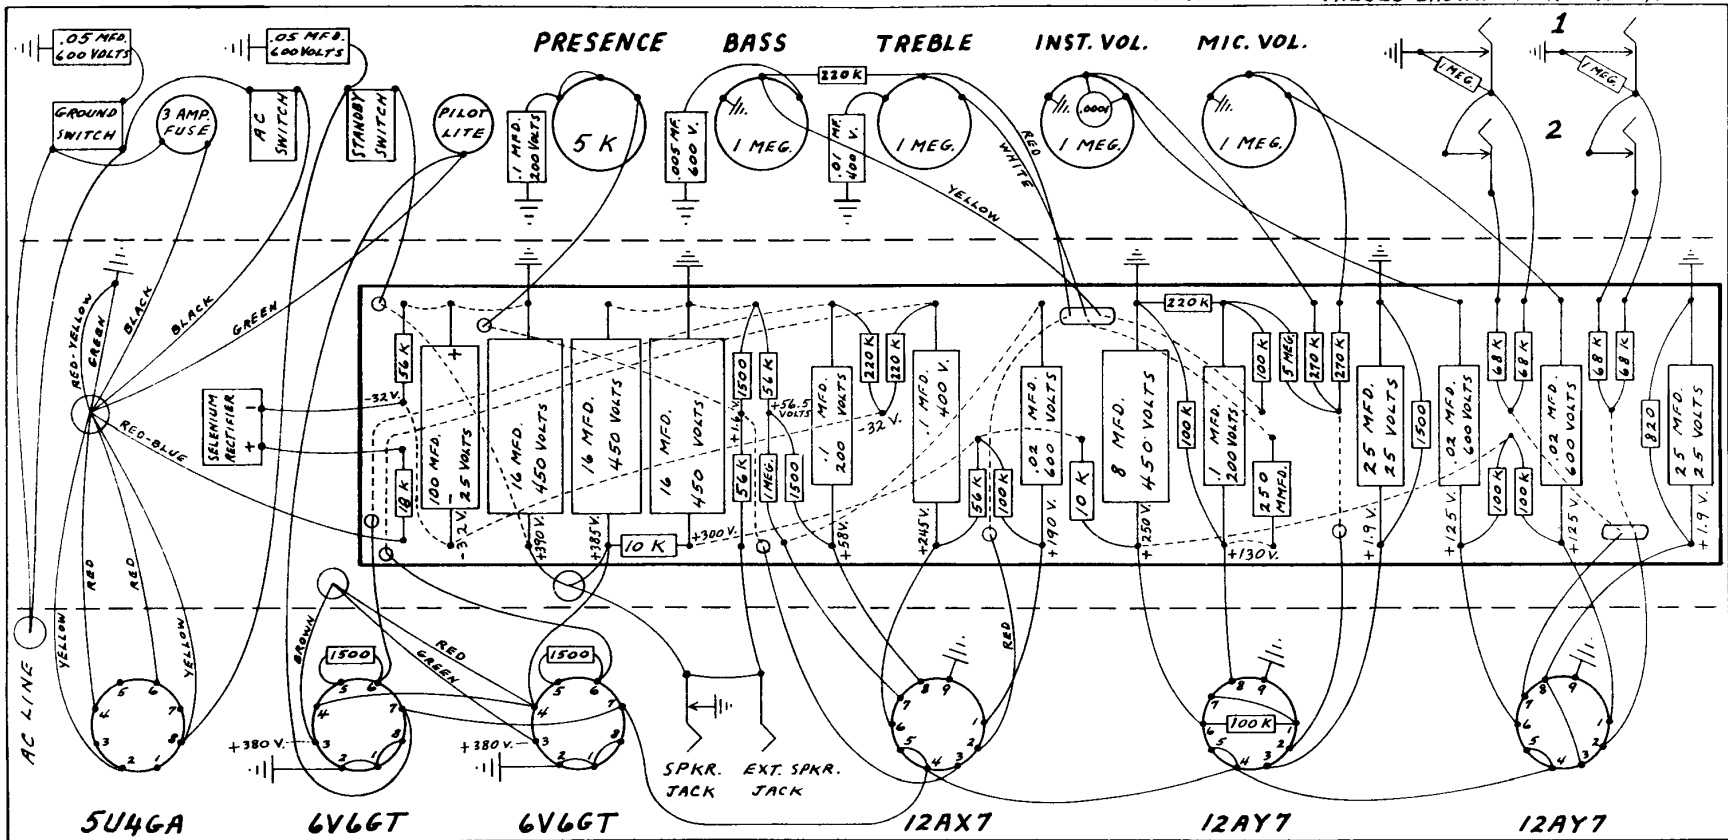

* SEE NOTE ON REVERSE SIDE


FENDER "SUPER-AMP" SCHEMATIC

MODEL 5E4-A*

G-EE

NOTICE

VOLTAGES READ TO GROUND WITH ELECTRONIC VOLT-METER VALUES SHOWN + OR - 20%

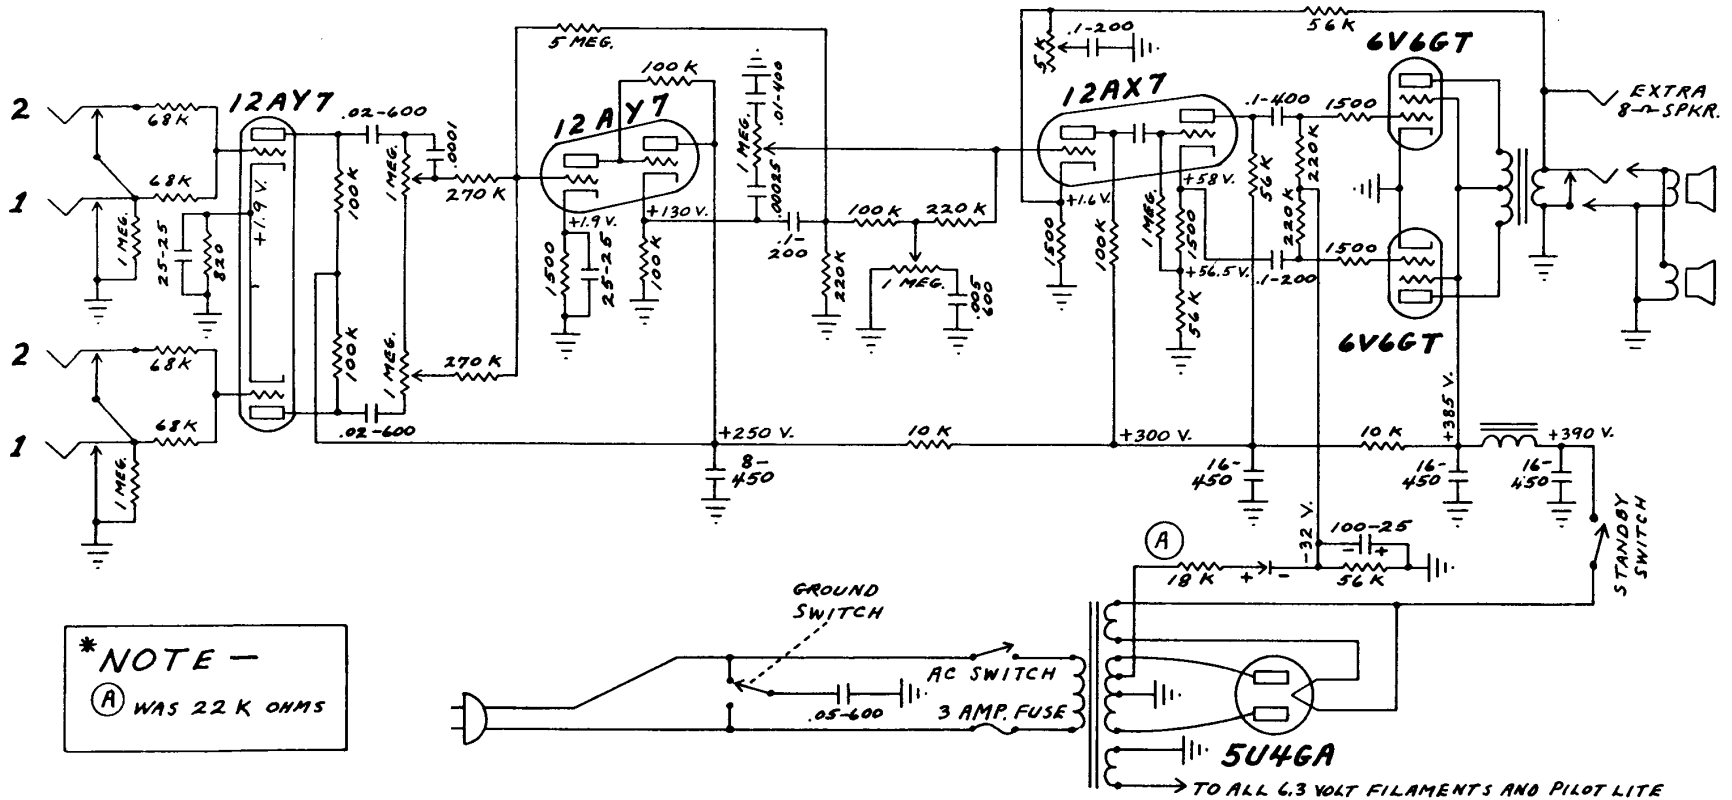

*NOTE -
 (A) WAS 22 K OHMS

5U4GA
 TO ALL 6.3 VOLT FILAMENTS AND PILOT LITE