


FENDER "TREMOLUX" LAYOUT MODEL 5E9-A

D-EE

NOTICE

VOLTAGES READ TO GROUND
WITH ELECTRONIC VOLTMETER
VALUES SHOWN $\pm 0.2\%$

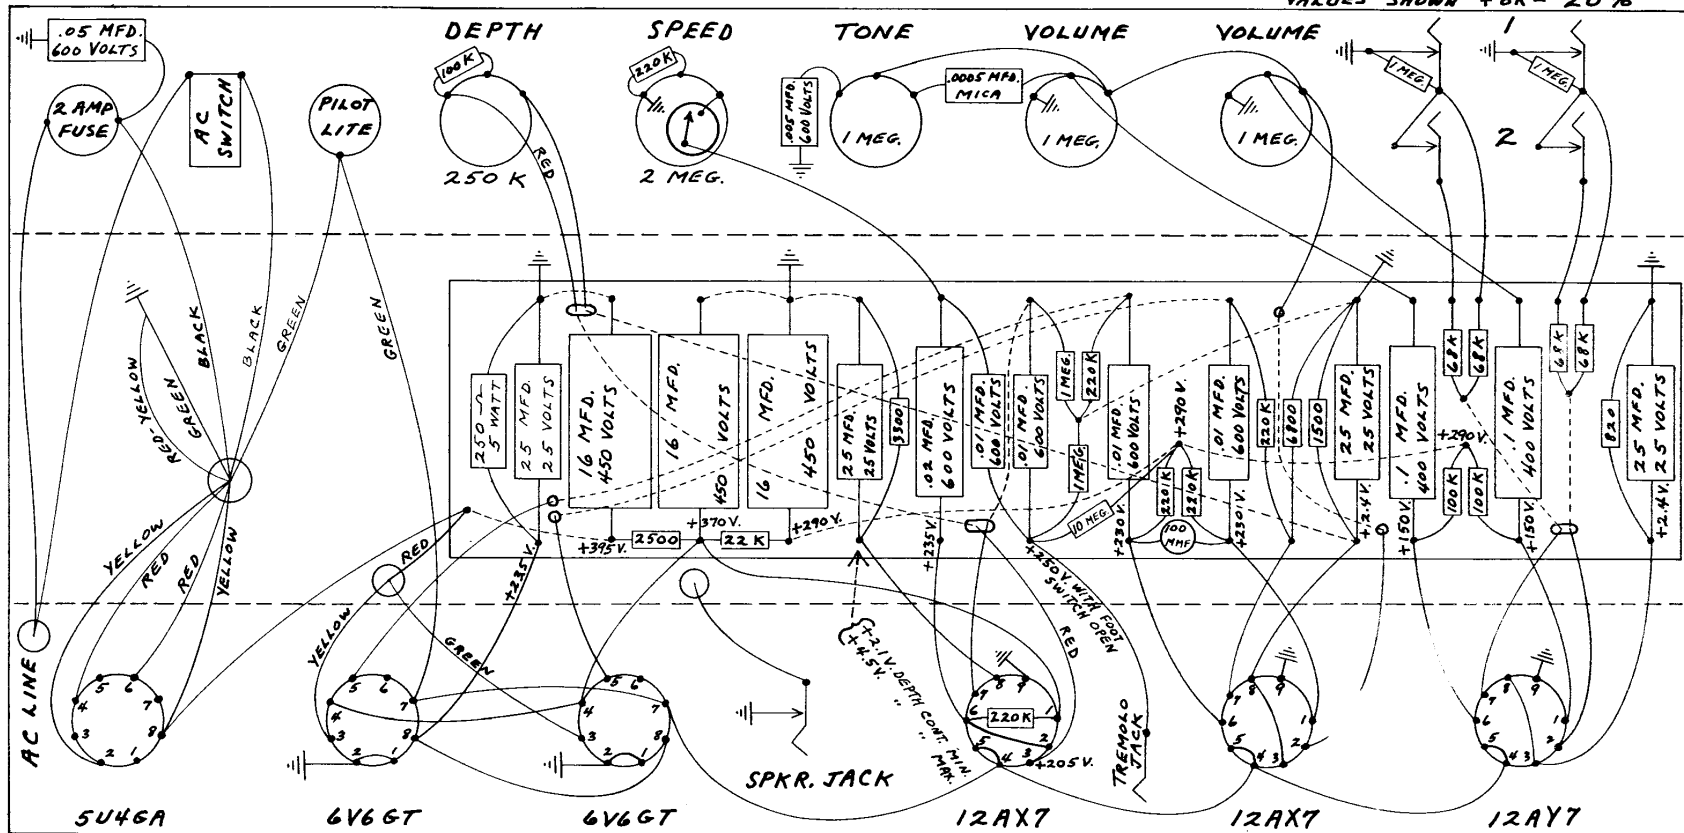

NOTE - MODEL 5E9 uses 5Y3GT INSTEAD OF 5U4GA

NOTE - EARLY MODELS HAVE SWITCH ON DEPTH CONTROL INSTEAD OF SPEED CONTROL. CIRCUIT IS SAME.

FENDER "TREMOLUX" SCHEMATIC MODEL 5E9-A

