
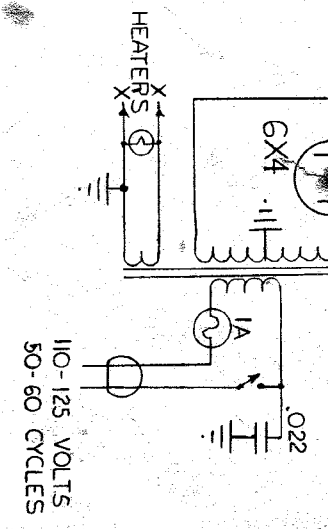


DC. VOLTAGES MEASURED TO GROUND WITH V.T.V.M.

TUBE LOCATION CHART

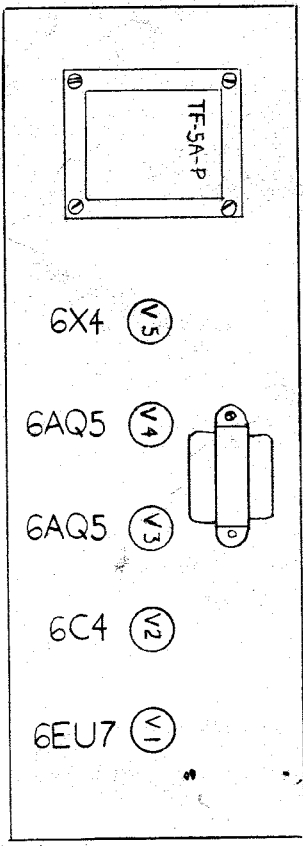

7-62 1M H.P.Co.

# INSTRUCTIONS

When only one instrument is used, plug into No. 1 input jack.

This amplifier is designed for 105-125 volt, 50-60 cycle current. Damage will result if connected to improper power source.

Use the above schematic to facilitate service by a reliable radio man.

Do not use higher rating fuse than one ampere, Slo-Blo, type 3 A.G.

This amplifier was carefully checked and in good playing condition when shipped. If damaged when received call transportation company immediately and place claim.