


NOTES:

1. ALL RESISTORS ARE 1/2W, 10%, UNLESS NOTED.
2. ALL CAPACITOR VALUES ARE IN MICROFARADS UNLESS NOTED.
3. VOLTAGES ARE WITH POWER ON, ALL CONTROLS FULL ON, NO SIGNAL, AND NO LOAD.
- * 4. DIODE CR702 IS MOUNTED IN A CLIP ON THE CHASSIS.
5. ALL TRANSISTORS ARE PET8002 OR SE4002, UNLESS NOTED.
- ▲ 6. SELECTED FOR 50V BVCEO.
7. ALL 38869 & 38870 TRANSISTORS REQUIRE CLIP ON TYPE HEAT SINKS.

TRANSISTOR LOCATION DIAGRAM

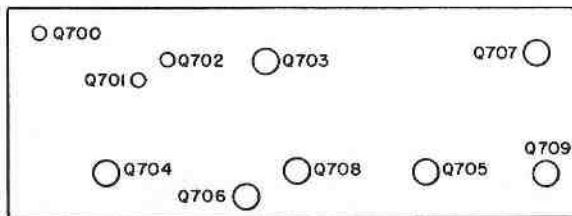

<i>Kustom</i>
PC704A
POWER AMP