


Magnatone built by 1946 DICKERSON
w/1948 Permaflux Speaker

©John F. Rider

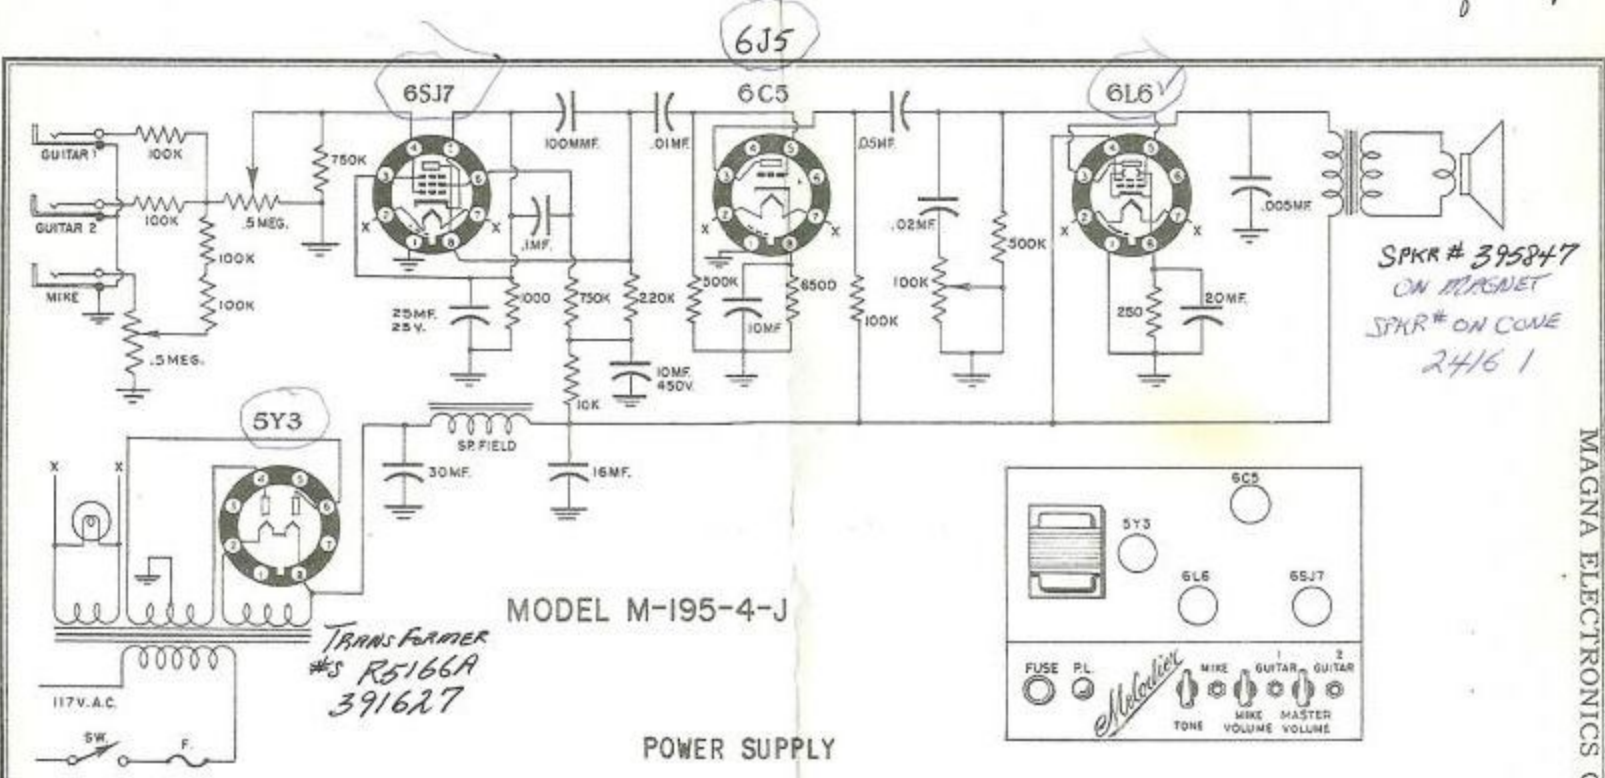

This Amplifier is designed to operate on any alternating current supply (AC) ranging from 110-120 Volts, 50-60 Cycles.

This Amplifier is designed for Musical Instrument and Microphone Amplification only. Using this unit to reproduce records will damage the speaker and electronic parts.

The Amplifier consists of a Beam Power Output Tube 6L6, 6C5 driver, 65J7 low level Amplifier, and 5Y3 Rectifier.

MAGNA ELECTRONICS CO.

MAGNA PA PAGE 1-3
MODEL M-195-4-J