



HERITAGE
VTA SERIES
8C-99001630

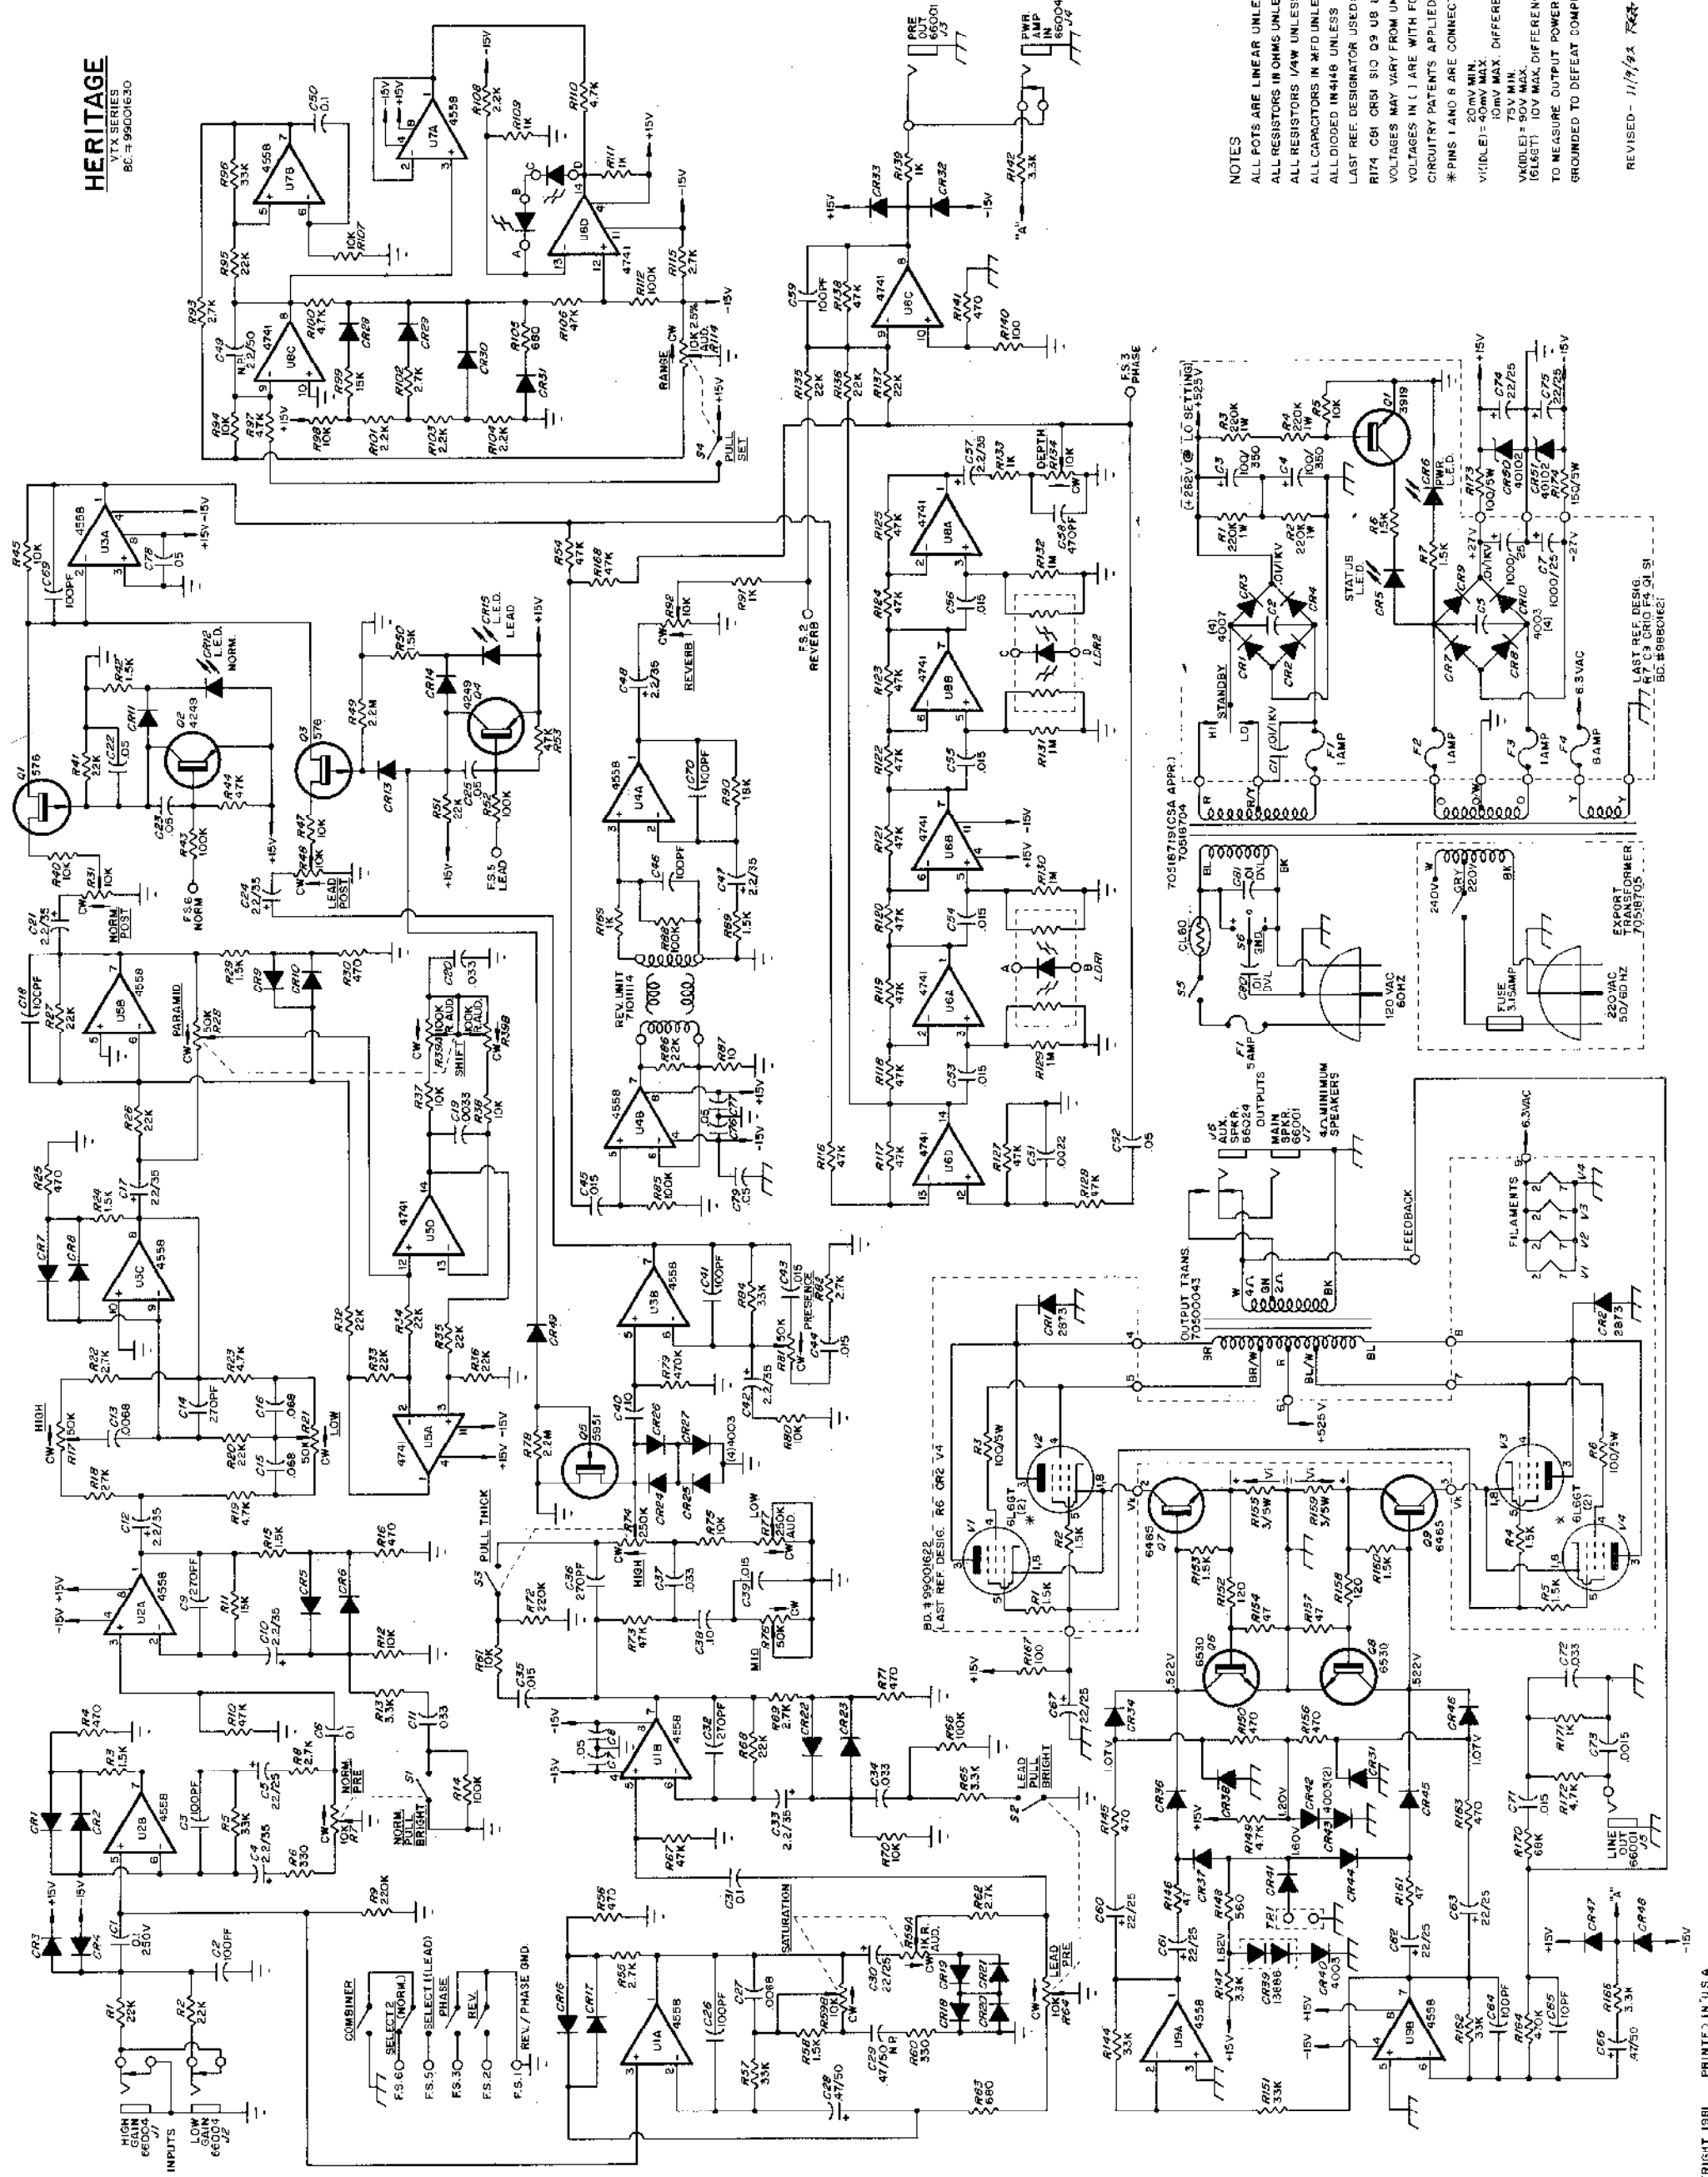

NOTES
ALL POTS ARE LINEAR UNLESS NOTED
ALL RESISTORS IN OHMS UNLESS NOTED
ALL RESISTORS IN μ M UNLESS NOTED
ALL CAPACITORS IN μ F UNLESS NOTED
ALL DIODES IN 400V UNLESS NOTED
LAST REF DESIGNATOR USED:
R174 CR1 S1 Q9 U8 LDR2 F1 J7
VOLTAGES MAY VARY FROM UNIT TO UNIT
VOLTAGES IN () ARE WITH FOOTSWITCH CLOSED
*PINS 1 AND 8 ARE CONNECTED ON ALL TUBES
V(I/DL/E) = 200V MIN.
100V MAX. DIFFERENCE BETWEEN SIDES
V(K/L/E) = 90V MAX.
40102 40102
TO MEASURE OUTPUT POWER RATING AT 5% T.A.D.T.P.I. MUST BE
GROUNDED TO DEFEAT COMPRESSOR EFFECT OF POWER AMP.

PEAVEY ELECTRONICS CORP.
MERIDIAN, MS.
DRAWN BY *[Signature]* DATE 8/25/81
C.B. CHECK *[Signature]*
CHECK BY *[Signature]*
APPR. BY *[Signature]*

REVISED - 11/19/81 R22

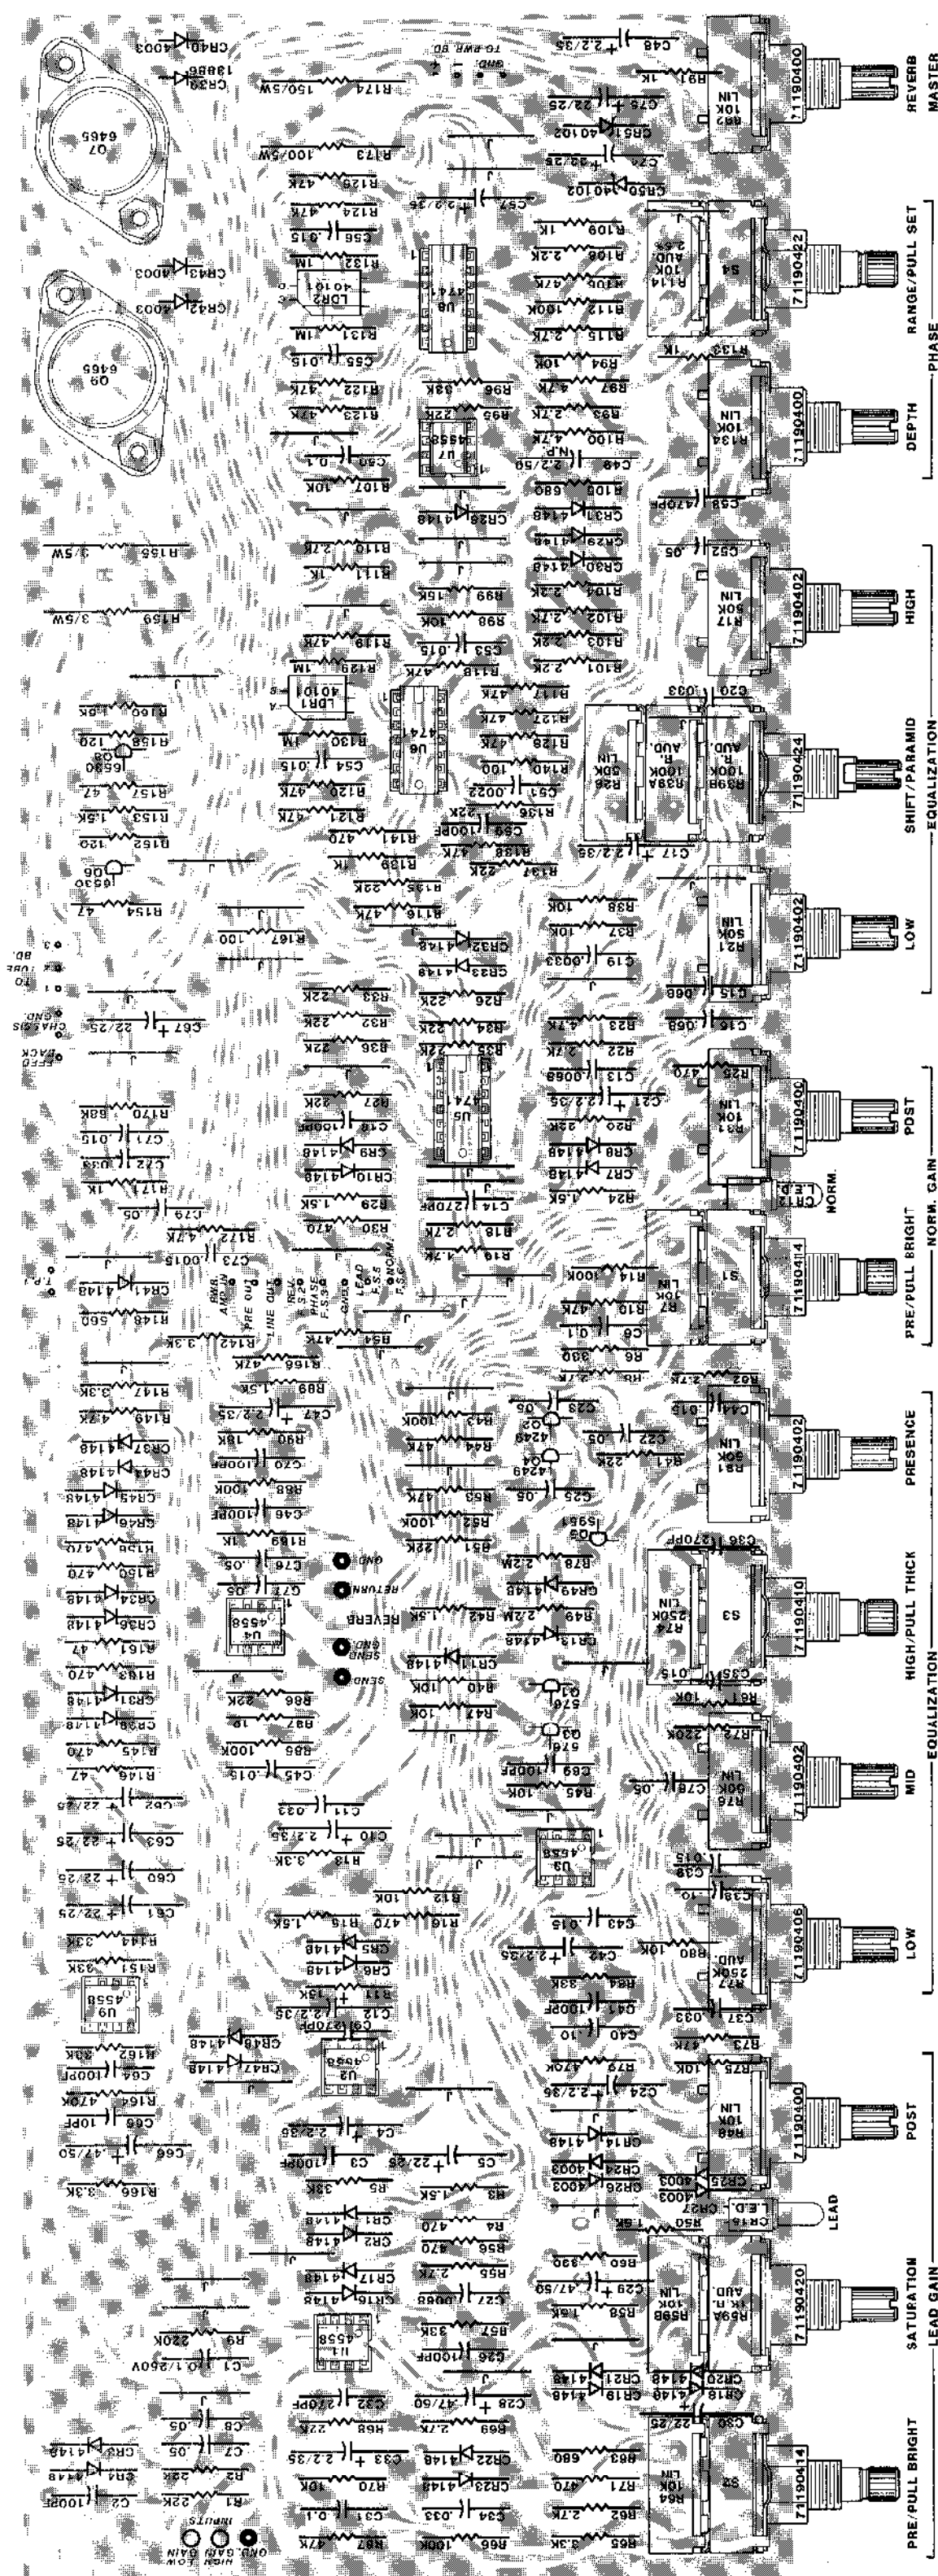

HERITAGE
VTX SERIES



VTX TUBE BD.

VTX POWER BD.